

Specifications:**Material And Finish:**

Terminal: Copper alloy

Rating:

Current Rating: 7 Amp

Voltage Rating: 300V AC/DC

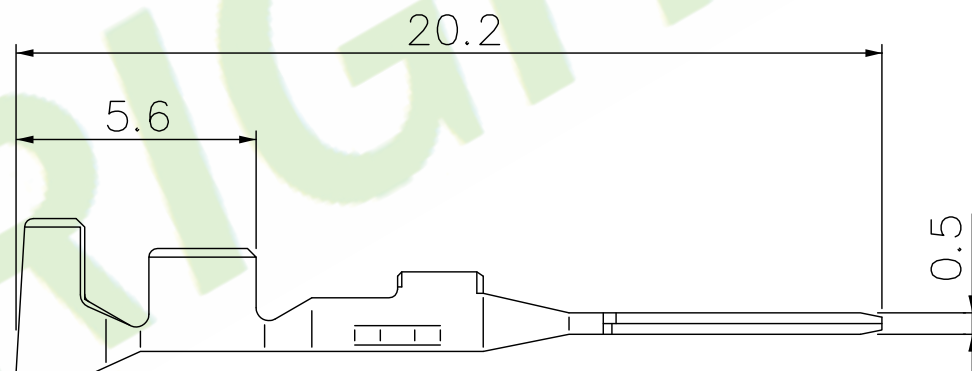
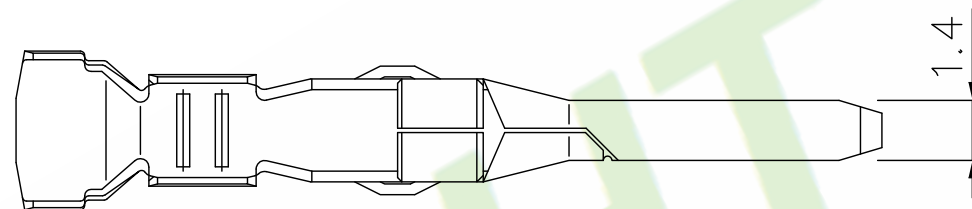
Operating Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ **Electrical:**

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M Ohm min.

Withstanding Voltage: 1500V AC/Minute

Wire Rang: AWG#22 to #18

**Ordering Information****H5004TM-PQ**

1 2 3 4

- 1: — Series No.
2: — T: Terminal
3: — M: Male Terminal
4: — Q: Tin Plated

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H5004TM-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 5.0mm Pitch Terminal				
2X				Aren	x.x: ±0.40	x.x': ±3.0°					
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°	DATE: 11-Jul-2021		SHEET: 1/1	SCALE: 1:1	UNIT: mm