

Specifications:

Material:

Insulator: PA 66 UL94V-0

Rating:

Current Rating: 7 Amp(18AWG)

Voltage Rating: 250V AC/DC



Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

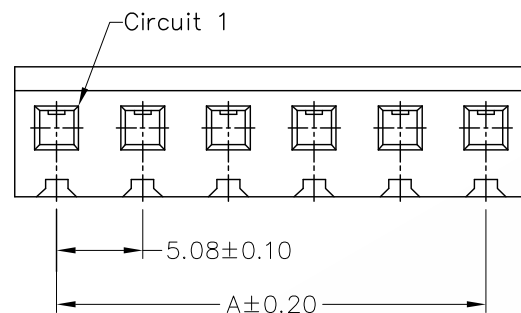

Ordering Information

H5081-XX-01-NX

1 2 3 4

1: — Series No.

2: — No. of Positions


3: — Color:

N: Natural(Translucent)

4: — A: In bag

B: In Tube

C: In Tray

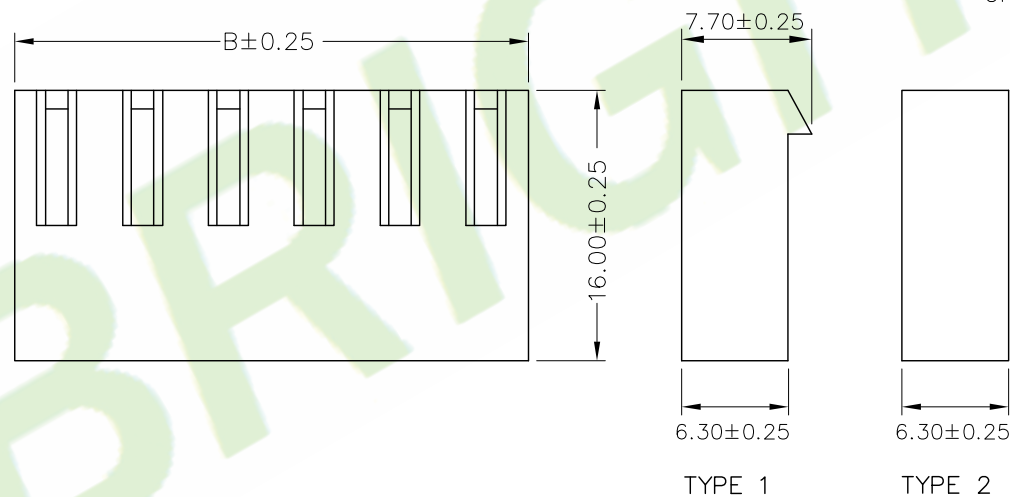

Ordering information & Dimensions

PART NO.	Dimensions	
	A	B
02	5.08	10.08
03	10.16	15.16
04	15.24	20.24
05	20.32	25.32
06	25.40	30.40
07	30.48	35.48
08	35.56	40.56
09	40.64	45.64
10	45.72	50.72
11	50.80	55.80
12	55.88	60.88
13	60.96	65.96
14	66.04	71.04
15	71.12	76.12
16	76.20	81.20
17	81.28	86.28
18	86.36	91.36
19	91.44	96.44
20	96.52	101.52

5X			
4X			
3X			
2X	Update code option	Deng	20230415
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Bruce
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±	X': ±
X.X: ±0.25	X.X': ±
X.XX: ±0.15	X.XX': ±
X.XXX: ±0.05	X.XXX': ±

PART NO : H5081-XX-01-NX

DWG. NO.:

TITLE :

5.08mm Pitch Housing

DATE: 24-Nov-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4