

Specifications:

Material And Finish:

Material: High conductivity copper

Rating:

Current Rating: 23Amp

AC, DC (12AWG/Peri pin)

Voltage Rating: 600V AC, DC

Temperature Range: -40°C ~ +105°C

Electrical:

Contact Resistance: 15m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage 2200V AC/minute

Ordering Information

H57001T-XXQ

1 2 3 4




1—Series No.

2—T: Terminal


3—P1: 12AWG

P2: 14~16AWG

4—Q: Tin Plated

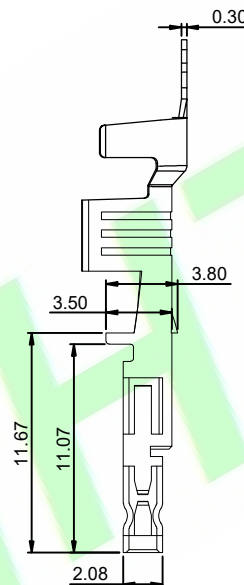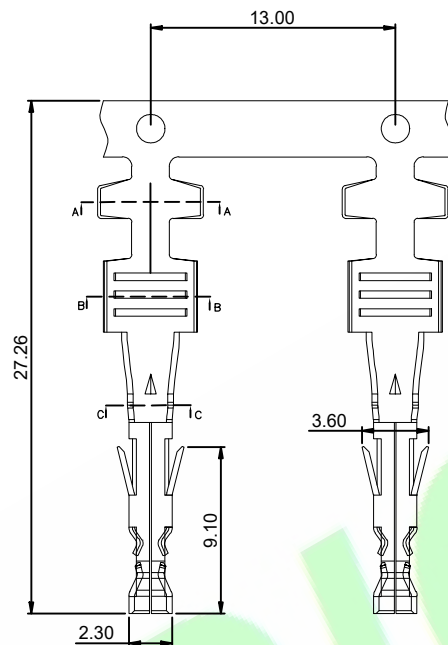


SECTION C-C




SECTION B-B

P1: CONDUCTOR AND INSULATION 12AWG




SECTION A-A




SECTION B-B

P2: CONDUCTOR AND INSULATION 14~16AWG



SECTION A-A

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H57001T-XXQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Deng	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x°: ±5.0°		TITLE :				
2X	Update code options	Deng	20230417	Ren	x.x: ±0.20	x.x°: ±3.0°	5.7mm Pitch 12~16AWG Terminal		SHEET: 1/1		A4
1X	ORIGINAL	Ken		APPD.:	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 21-Apr-2021		SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°			UNIT: mm		

A4