
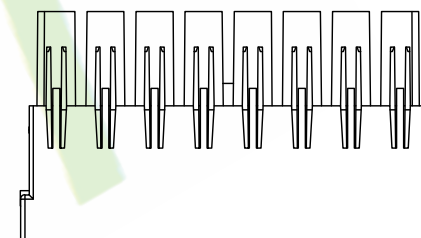

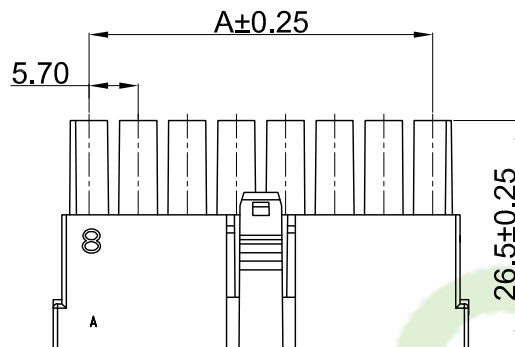


Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0;Color:Black

Rating:
Current Rating:23A AC/DC(12AWG/ per pin)
Voltage Rating:600V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:2200V AC/Minute



Ordering Information

H5701-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In bag

Part No.	Dimension mm	
	A	B
02P	5.70	12.05
03P	11.40	17.75
04P	17.10	23.45
05P	22.80	29.15
06P	28.50	34.85
07P	34.20	40.55
08P	39.90	46.25

5X			
4X			
3X			
2X	Update code options	Judyyan	20220728
1X	ORIGINAL	Ken	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Ken
CHKD.: Mark
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.50	X': ±5.0°
X.X: ±0.40	X.X': ±3.0°
X.XX: ±0.25	X.XX': ±2.0°
X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : H5701-XXX-A
DWG. NO.:
TITLE : 5.7mm Crimping Male Housing Single ROW
DATE: 16-Jun-2019

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4