

Specifications:
Material And Finish:
Material:High conductivity copper



Rating:
Current Rating:23Amp
AC,DC(12AWG/Peri pin)
Voltage Rating:600V AC,DC
Temperature Range:-40°C~+105°C

Electrical:
Contact Resistance:15m Ohm Max


Ordering Information
H5701T-XXQ

1 2 3 4


- 1—Series No.
2—T:Terminal
3—P1:12AWG
P2:14~16AWG
4—Q:Tin Plated

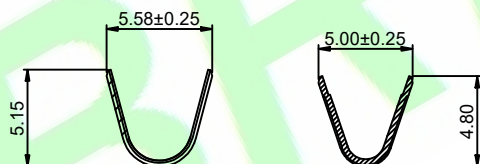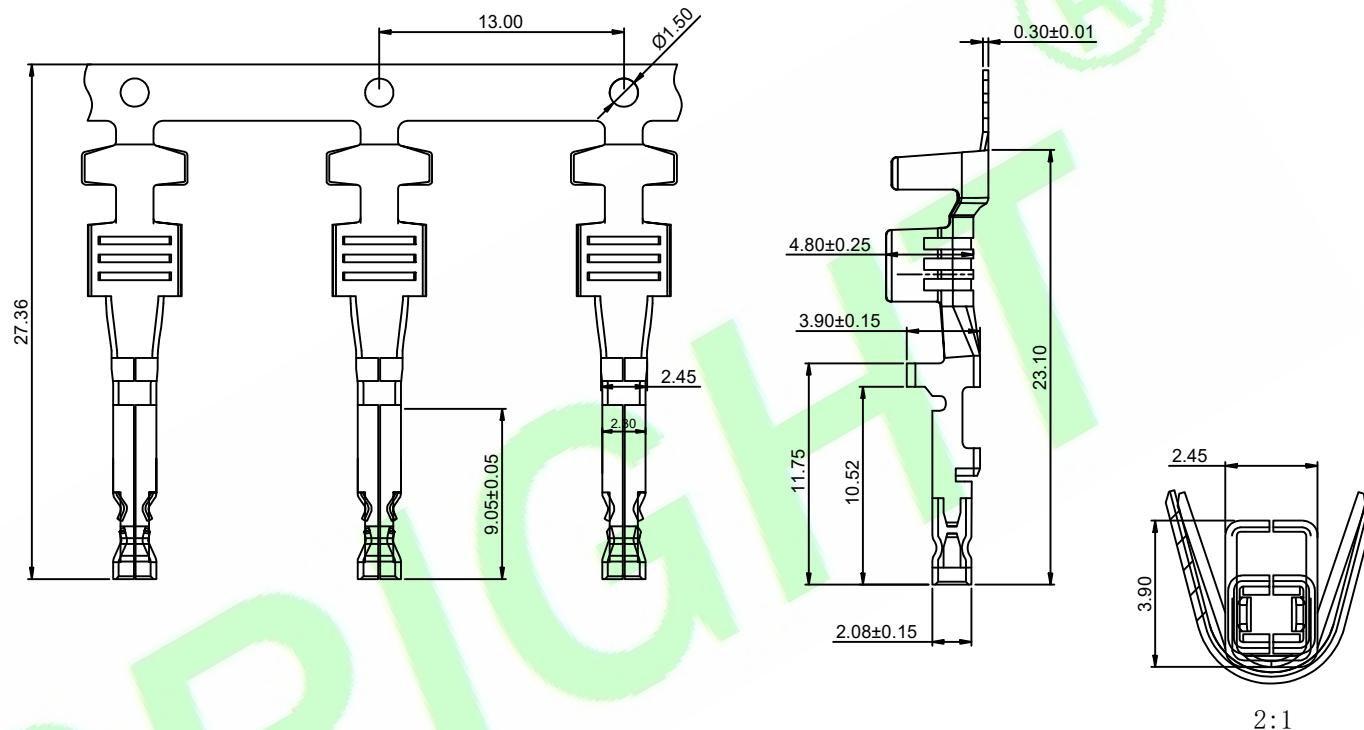

P1: CONDUCTOR AND INSULATION12AWG

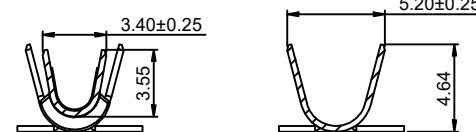

P2: CONDUCTOR AND INSULATION14-16AWG

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H5701T-XXQ	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Ren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	x.x: ±0.20	x.x': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update code options	Deng	20230417		x.xx: ±0.10	x.xx': ±3.0°	5.7mm Pitch 12~16AWG Terminal	SCALE: 1:1	
1X	ORIGINAL	Ken			x.xxx: ±0.02	x.xxx': ±1.0°	DATE: 21-Apr-2021	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.						A4