

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Copper Alloy

Shell: Cold-rolled With Nickel Plated

Plated: See Ordering Information

Rating:

Current Rating: 0.5 Amp

Voltage Rating: 40V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance:

Contact: 30m Ohm Max

Shell: 50m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information**HDMID-20RH-01-C**

1 2 3 4 5

1: — Series No.

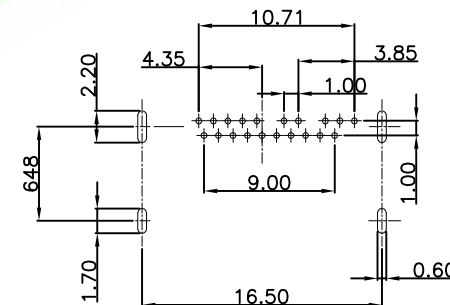



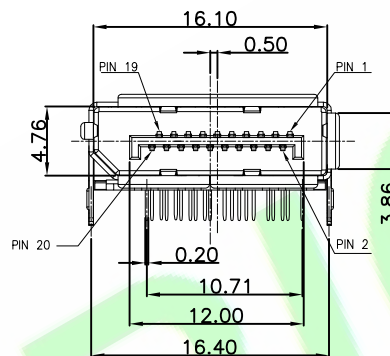

2: — D:D Type

3: — No. of Positions

3: — R:R/A Type

4: — H: Selective Gold Flash

5: — C: In Tray

RECOMMENDED PCB LAYOUT
(THICKNESS=1.6±0.15mm)

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : HDMID-20RH-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : HDMI CONNECTOR D Type R/A Dip fish Spear No pillars	SHEET: 1/1	THIRD ANGLE PROJECTION
2X					X.X: ±0.25	X.X': ±3.0°	DATE: 2-Aug-2020	SCALE: 1:1	
1X	ORIGINAL	Judyyan			X.XX: ±0.20	X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4