
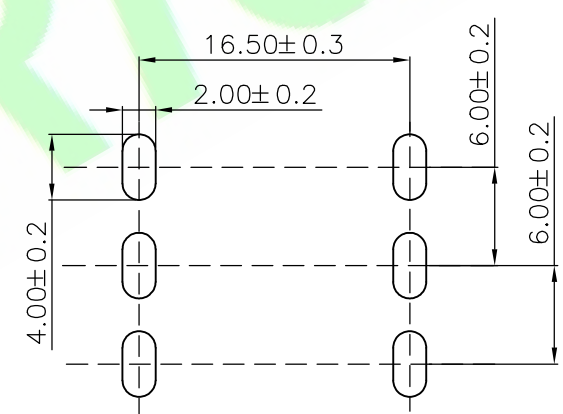
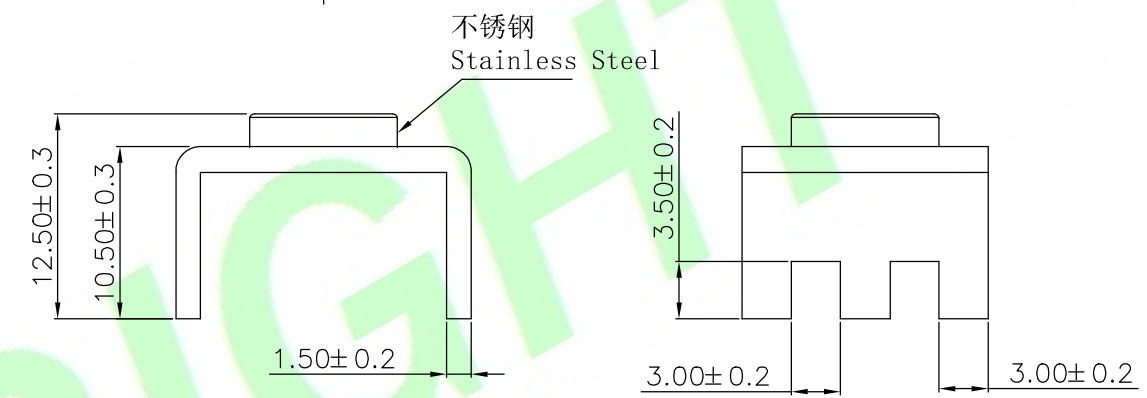


技术要求:

Technical requirements:

1. 材质: 紫铜&不锈钢
1. Material: Copper&Stainless Steel
2. 打铜底0.5-1 μm, 镍1-3 μm, 雾锡3-5 μm
2. Copper base 0.5-1 μm, nickel-3 μm, Matte tin 3-5 μm
3. 不得有变形, 毛刺等缺陷
3. No deformation, burr and other defects
4. 插脚尖部符合可焊性要求
4. The tip of the insert foot meets the solderability requirements
5. 螺纹需符合通止规要求
5. The thread shall meet the requirements of the stop rule
6. 螺纹扭距: 20Kgf.cm
6. Thread torque: 20Kgf.cm
7. 额定电流: 100A
7. Current Rating: 100A
8. 工作温度: -40℃~+120℃
8. Operating Temperature Range: -40℃~+120℃

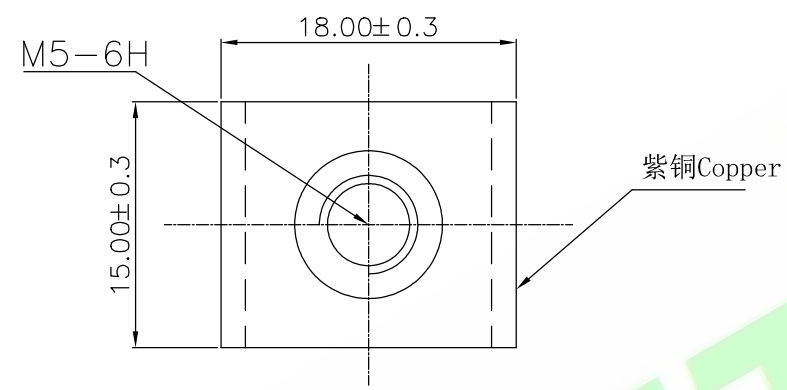

Recommended PCB Layout

				DR.BY.: Tony.Zou		GENERAL TOLERANCE:		PART NO : KM1800S—M5—A		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Hu.Ch		LINEAR	ANGLES	DWG. NO.:							
2X	尺寸更新: 由3.0变更为3.5	Tony.Zou	20240812	APPD.: Billy		X.: ±0.35	X': ±5.0°	TITLE : M5—6H Connecting Terminal		SHEET: 1/1			A4		
1X	ORIGINAL	Tony.Zou				X.X: ±0.25	X.X': ±3.0°			SCALE: 1:1					
REV.	DESCRIPTION	DR.BY	ECN. NO			X.XX: ±0.15	X.XX': ±2.0°			DATE: 05—Aug—2023				UNIT: mm	
1		2		3		4		5		6		7		8	