

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

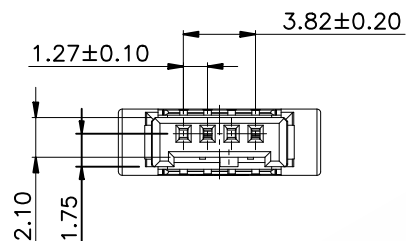
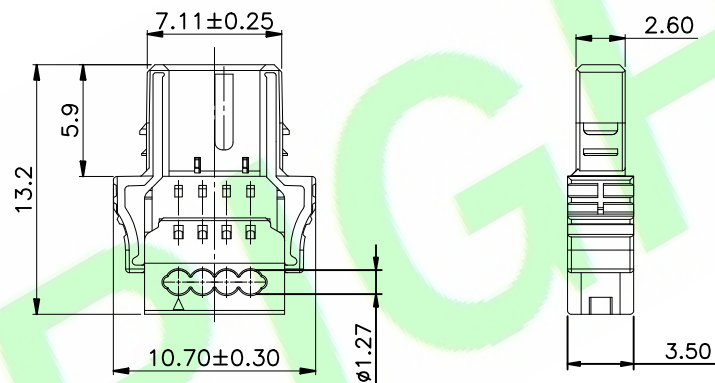

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

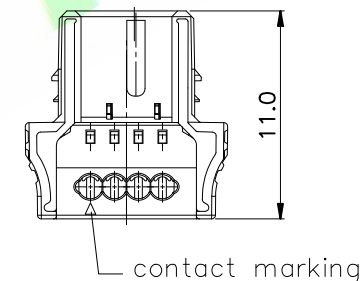
Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

with opening cable guide mounted
(state at time of supply)

cable guide pressed on



Ordering Information

M1270-04X-XX-AA

1 2 3 4 56

- 1: — Series No.
2: — No. of Positions
3: — Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail
- 4: — 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black
- 5: — A: 90 Degree
6: — A: In Bag

A Type Red	B Type Green	C Type Blue	D Type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-04X-XX-AA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : MicroBridge Female cable Outlet 90 IDC Type 0.35MM2		SHEET: 1/1			A4
2X	Correction of operating temperature	Judyyan	20240305		x.xx: ±0.20	x.xx': ±2.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Nov-2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.									