

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Current Rating:9.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.

Ordering Information


M1270-08X-XX-AA

1 2 3 4 5 6



1:— Series No.
2:— No. of Positions
3:— Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail

4:— 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black


5:— A: 90 Degree
6:— A: In Bag

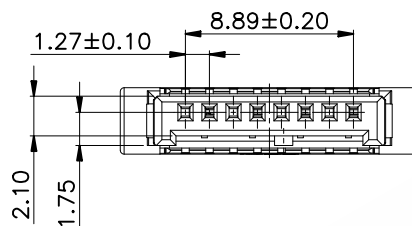

with opening cable guide mounted
(state at time of supply)

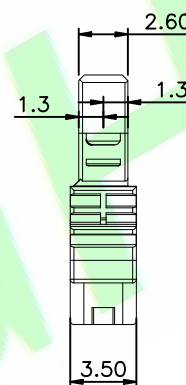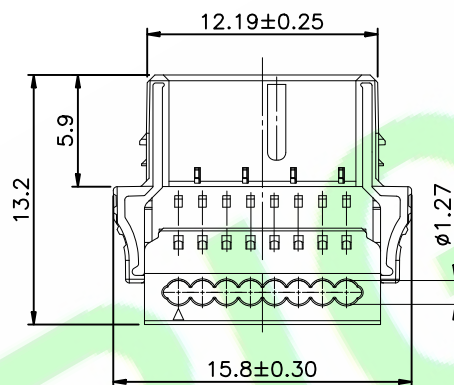

Cable guide pressed on

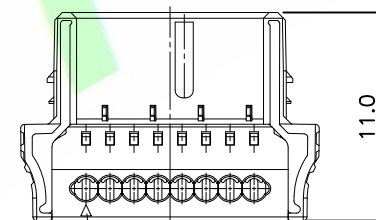

contact marking

A Type Red	B Type Green	C Type Blue	D Type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:	PART NO : M1270-08X-XX-AA	HJNBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren	LINEAR	DWG. NO.:		
3X				APPD.: Billy	ANGLES	TITLE : MicroBridge Female cable Outlet 90 IDC Type 0.35MM2	SHEET: 1/1	
2X	Correction of operating temperature	Judyyan	20240305		X.: ±5.0°		SCALE: 1:1	
1X	ORIGINAL	Judyyan			X.X: ±0.30		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.20	DATE: 12-Nov-2021		
					X.XXX: ±0.10			