

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Current Rating:9.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.

Ordering Information


M1270-10X-XX-AA
1 2 3 4 5 6

1: — Series No.
2: — No. of Positions
3: — Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail



4: — 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black

5: — A: 90 Degree


6: — A: In Bag

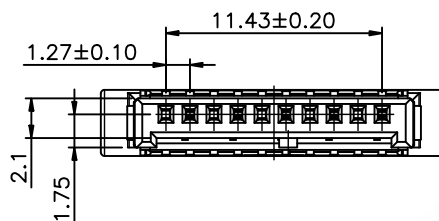

with opening cable guide mounted
(state at time of supply)

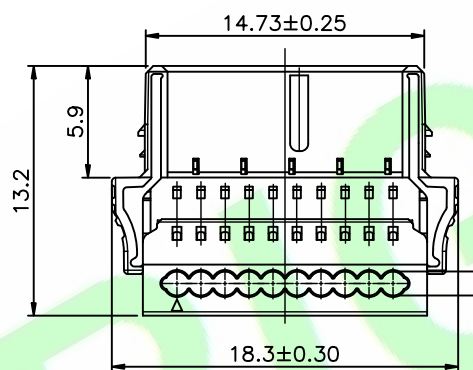

Cable guide pressed on

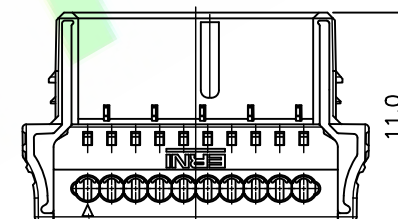

contact marking

A Type Red	B Type Green	C Type Blue	D Type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-10X-XX-AA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Aren	x.:	x°: ±5.0°	TITLE : MicroBridge Female cable Outlet 90 IDC Type 0.35MM2	SHEET: 1/1		A4
2X	Correction of operating temperature	Judyyan	20240305		x.x: ±0.30	x.x°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx°: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 12-Nov-2021			