



RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

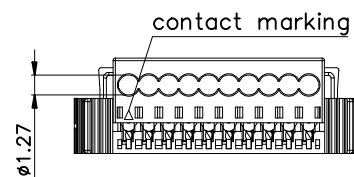
Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

with opening cable guide mounted
(state at time of supply)

Ordering Information

M1270-10X-XX-BA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01: A Type Red

02: B Type Green

03: C Type Blue

04: D Type Black

5: — B: 180 Degree

6: — A: In Bag

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4