

Specifications:**Material And Finish:**

Insulator: Color:Natural

Rating:

Current Rating:2P/22AWG 8.0 Amp

Operating Voltage:300V

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:1000M ohm min

Withstanding Voltage:1000V AC/Minute




Ordering Information**M2000-XXP-01-A**

1 2 3

1: — Series No.





2: — No. of Positions

3: — A:In Bag

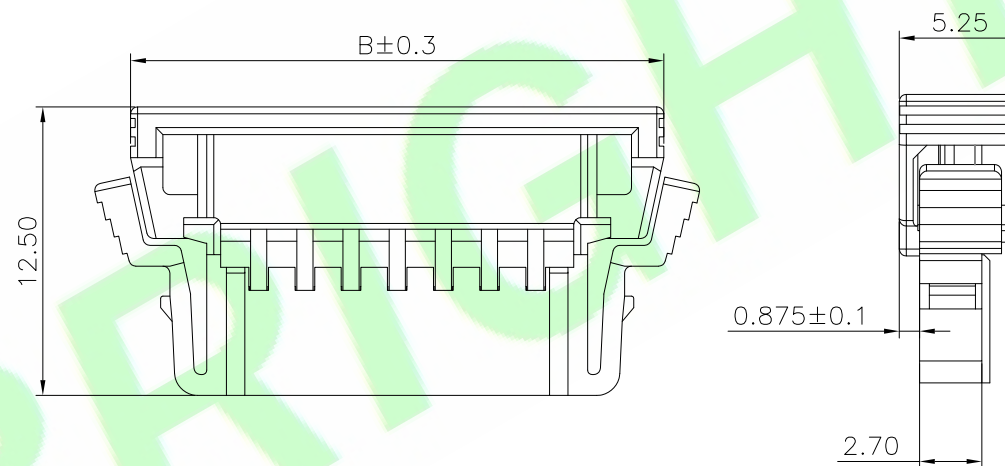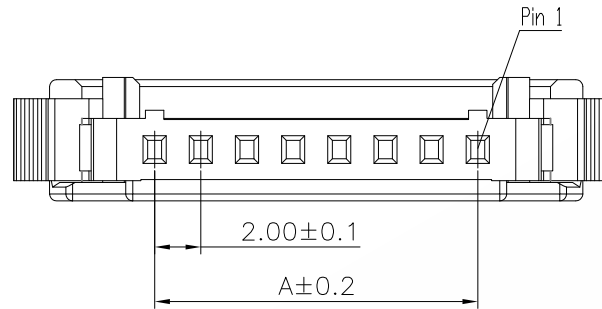

No.	Dimensions(mm)	
	A	B
2	2.0	11.1
3	4.0	13.1
4	6.0	15.1
5	8.0	17.1
6	10.0	19.1
8	14.0	23.1
10	18.0	27.1
12	22.0	31.1

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M2000-XXP-01-A
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Aren	X.: ±	X': ±6.0°	TITLE : iBridge male 2mm pitch Single Row Housing
2X					X.X: ±0.30	X.X': ±3.0°	
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.20	X.XX': ±2.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±2.0°	DATE: 04-Jun-2021

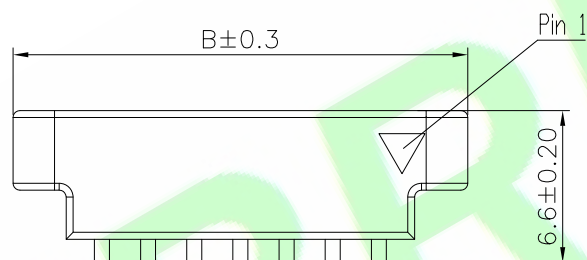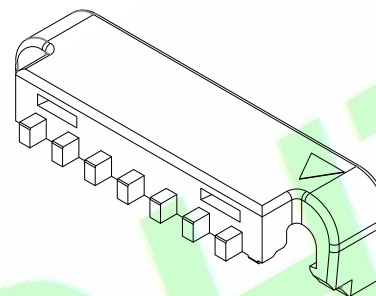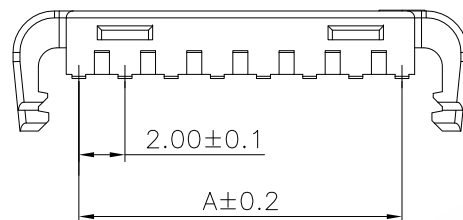

No.	Dimensions(mm)	
	A	B
2	2.0	7.7
3	4.0	9.7
4	6.0	11.7
5	8.0	13.7
6	10.0	15.7
8	14.0	19.7
10	18.0	23.7
12	22.0	27.7

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M2000-XXP-01-A
4X					LINEAR	ANGLES	
3X				CHKD.: Aren	X.: ±	X': ±6.0°	DWG. NO.:
2X					X.X: ±0.30	X.X': ±3.0°	
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE : iBridge male 2mm pitch Single Row Housing
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±2.0°	DATE: 04-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4