

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Natural

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:2P/22AWG 8.0 Amp

Operating Voltage:300V

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:5m Ohm Max


Insulator resistance:1000M ohm min

Withstanding Voltage:1000V AC/Minute

Ordering Information**M2000M-XXX-01-F**

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin on tail
H:Gold flash on contact;
Matte Tin on tail
5: — F:W/Cap In Tape&Reel

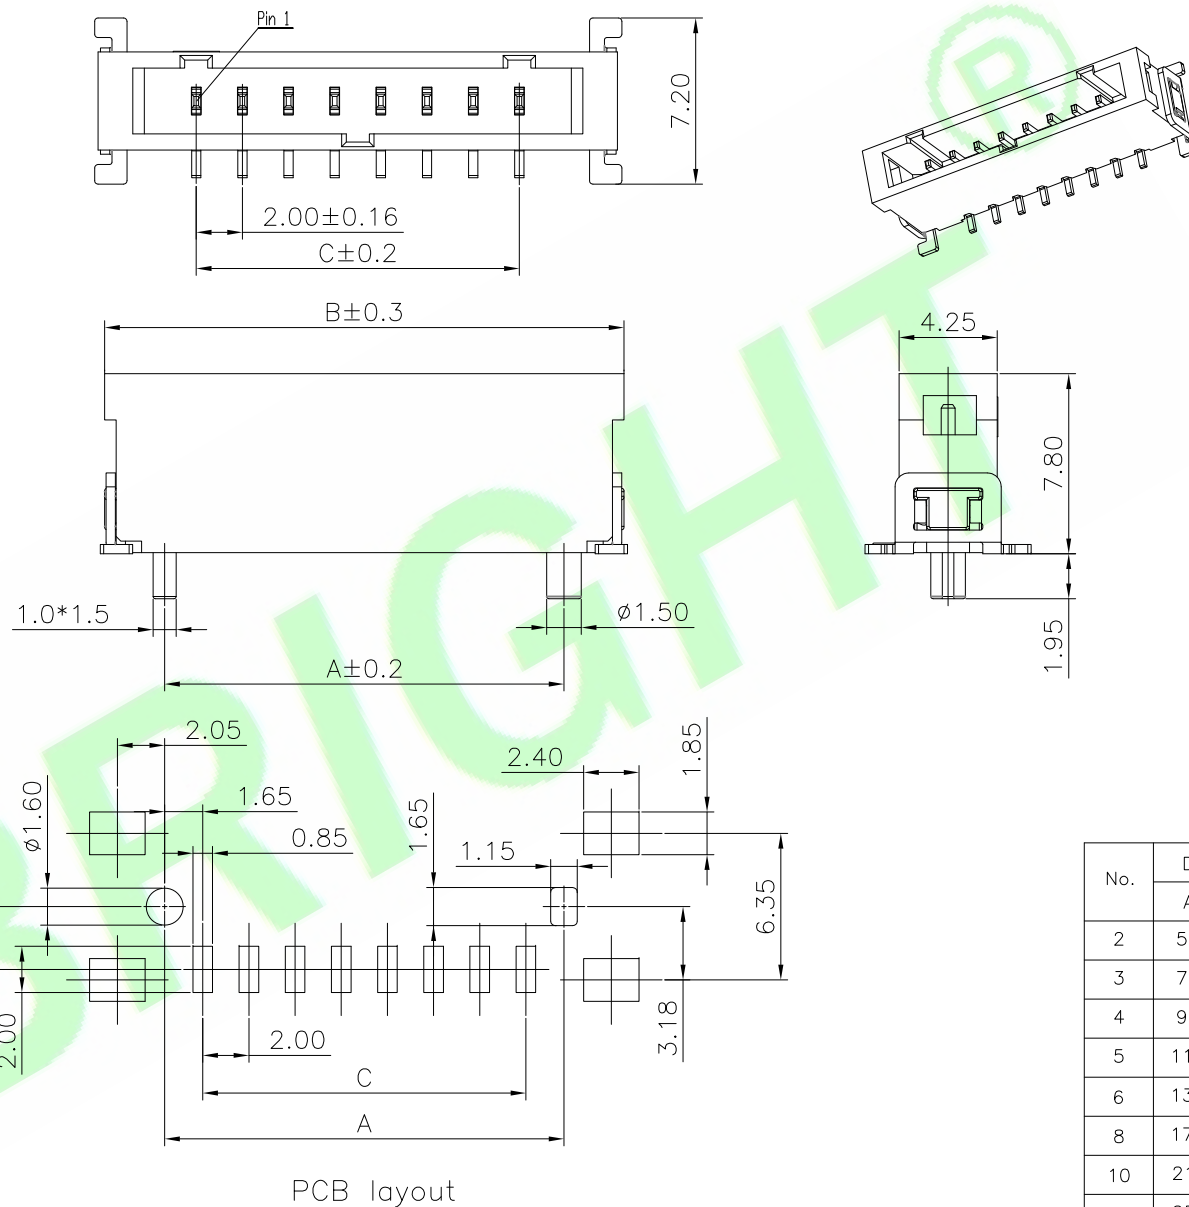

No.	Dimensions(mm)		
	A	B	C
2	5.3	10.5	2.0
3	7.3	12.5	4.0
4	9.3	14.5	6.0
5	11.3	16.5	8.0
6	13.3	18.5	10.0
8	17.3	22.5	14.0
10	21.3	26.5	18.0
12	25.3	30.5	22.0

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M2000M-XXX-01-F	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	X.: ±	X': ±6.0°	TITLE : iBridge male 2.0mm pitch Single Row SMT Type			
2X					X.X: ±0.30	x.x': ±3.0°				
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	x.xxx': ±2.0°	DATE: 04-Jun-2021			