

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

cover loose mounted

cover pressed on

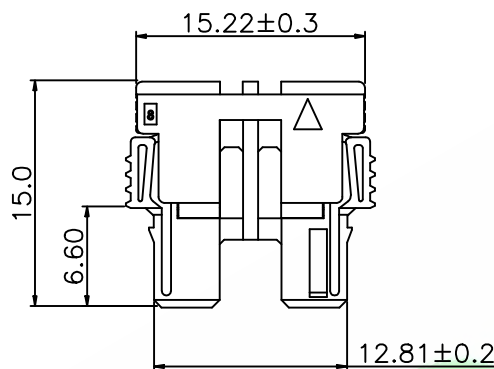

Ordering Information

M2540-02P-XX-A-01

1 2 3 4


1: — Series No.

2: — No. of Positions


3: — 01:A Type White
02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black

4: — A:In Bag


A type White




B type Red




C type Green



D type Blue



E type Black



5X			
4X			
3X			
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:
JudyyanCHKD.:
TonyAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : M2540-02P-XX-A-01

DWG. NO.:

TITLE : M2.54 SRC-A Housing 2P
Creepage distance>9.6mm

DATE: 30-Mar-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4