

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

cover loose mounted

cover pressed on

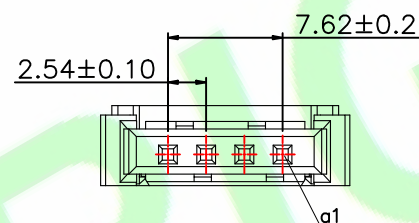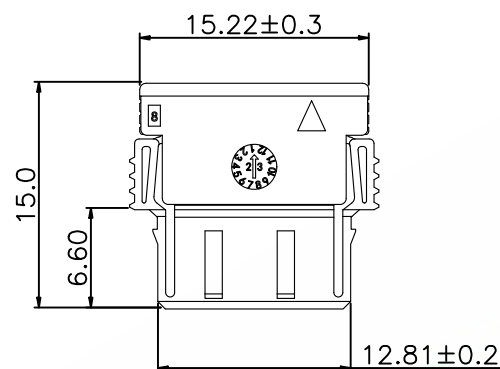

Ordering Information

M2540-04P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — 01:A Type White
 02:B Type Red
 03:C Type Green
 04:D Type Blue
 05:E Type Black

4: — A:In Bag

A type White	B type Red	C type Green	D type Blue	E type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M2540—04P—XX—A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.:	x*: ±5.0°	TITLE : M2.54 SRC-A Housing 4P		SHEET: 1/1			A4
2X	Update operating temperature	Judyyan	20240228		x.x: ±0.30	x.x*: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx*: ±2.0°	DATE: 5-Sep-2021		UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx*: ±1.0°						