

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max



Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

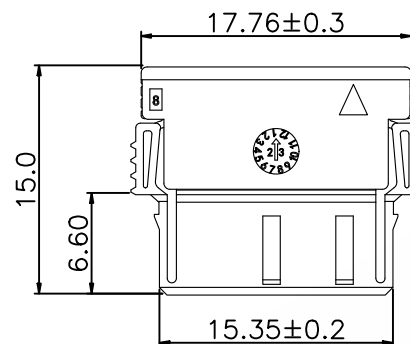

cover loose mounted

cover pressed on

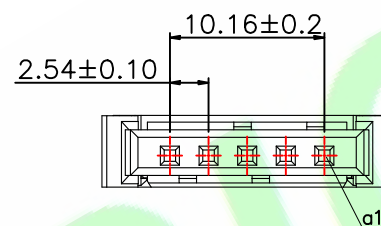

Ordering Information

M2540-05P-XX-A
 1 2 3 4

1:—Series No.

2:—No. of Positions

3:—01:A Type White

02:B Type Red


03:C Type Green

04:D Type Blue


05:E Type Black

4:—A:In Bag


A type White




B type Red




C type Green



D type Blue



E type Black



5X			
4X			
3X			
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:
JudyyanCHKD.:
TonyAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±5.0°

X.X: ±0.30 X.X: ±3.0°

X.XX: ±0.20 X.XX: ±2.0°

X.XXX: ±0.10 X.XXX: ±1.0°

PART NO : M2540-05P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-A Housing 5P


DATE: 5-Sep-2021

HJBRIGHT® 东莞市華晶电子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4