

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute



cover loose mounted

cover pressed on

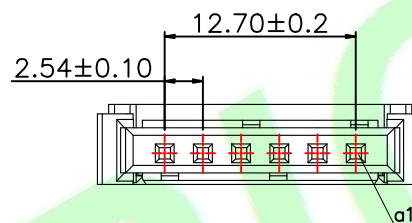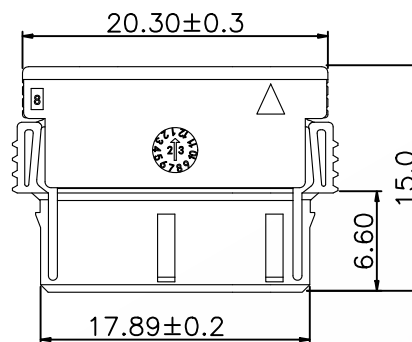

A type White




B type Red



C type Green

D type Blue

E type Black



Ordering Information

M2540-06P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — 01:A Type White

02:B Type Red

03:C Type Green

04:D Type Blue

05:E Type Black

4: — A:In Bag

5X			
4X			
3X			
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:
JudyyanCHKD.:
TonyAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : M2540-06P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-A Housing 6P

DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4