

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0

Rating:
Current Rating:12.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+150°C



Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

M2540-10P-XX-A

1 2 3 4


- 1:— Series No.
2:— No. of Positions
3:— 01:A Type White
02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black
4:— A:In Bag

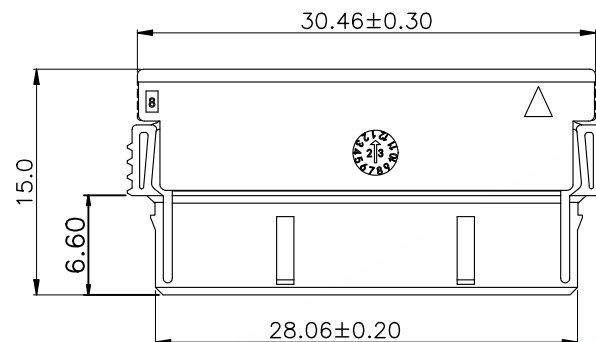


cover loose mounted




cover pressed on

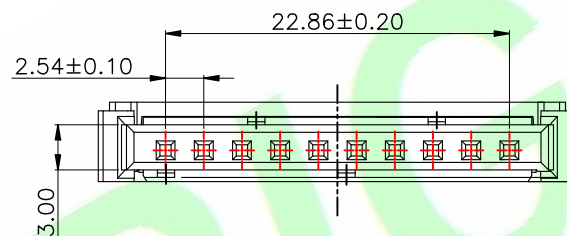


A Type White

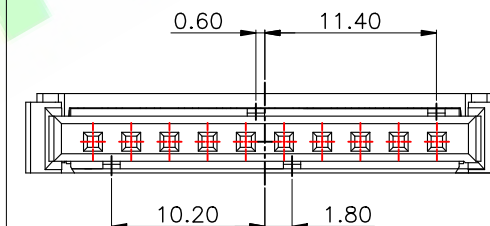


B Type Red

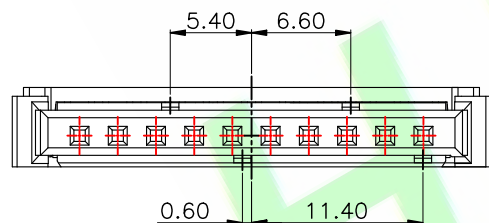


C Type Green

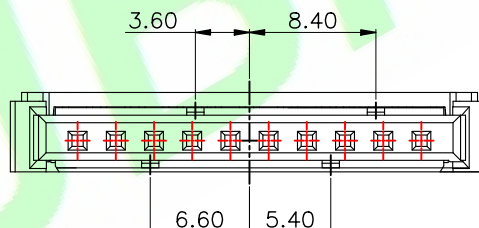

D Type Blue

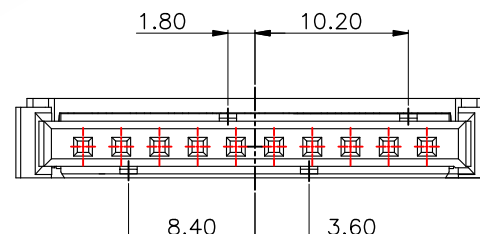

E Type Black

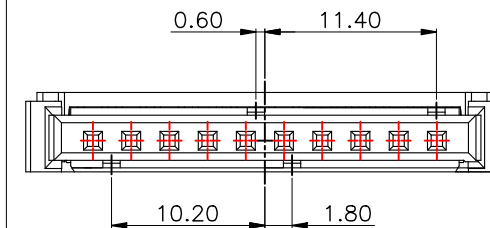

5X			
4X			
3X			
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Hu.CH
CHKD.: Sam
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : M2540-10P-XX-A
DWG. NO.:
TITLE : M2.54 SRC-A Housing 10PIN
DATE: 25-Dec-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4