

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0



Rating:
Current Rating:12.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+150°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

M2540-12P-XX-A
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01:A Type White
02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black
4: — A:In Bag

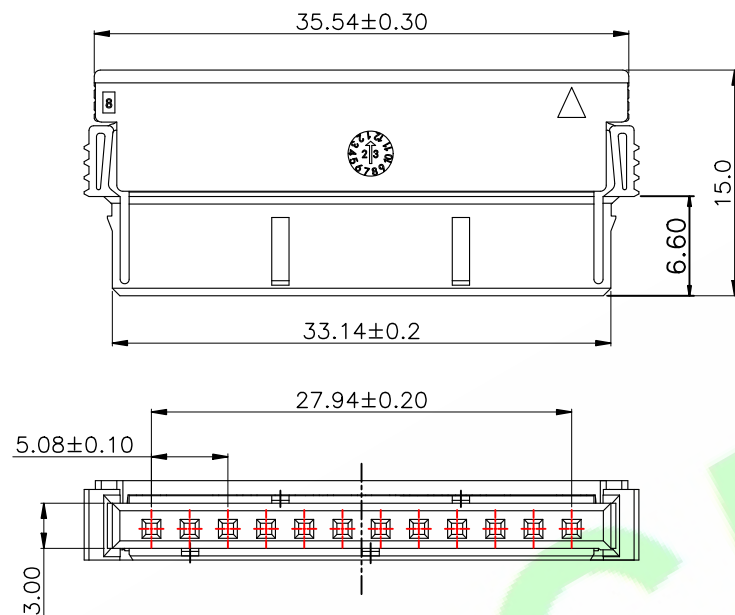


cover loose mounted




cover pressed on


A Type White

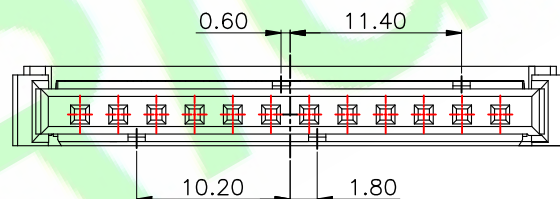


B Type Red

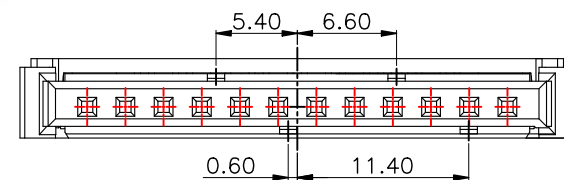


C Type Green

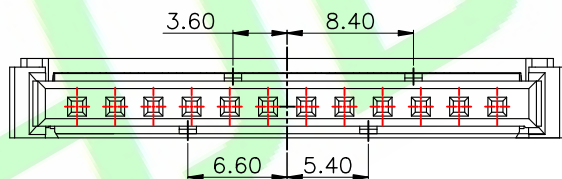

D Type Blue

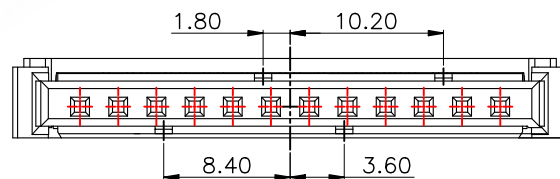

E Type Black

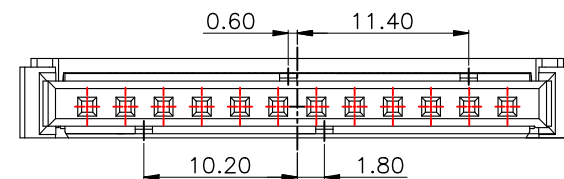

5X			
4X			
3X			
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Hu.CH
CHKD.:	Sam
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.10	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

PART NO : M2540-12P-XX-A
DWG. NO.:
TITLE : M2.54 SRC-A Housing 12PIN
DATE: 25-Dec-2023

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4