

RoHS Compliant

Specifications:
Material: Copper alloy
Wire Range: AWG#18~26
Operating Temperature Range: -55°~+150°C

A Reel 12,000 PCS

Ordering Information
M2540T-PXX

1 2 3

1: Series No.





2: T: Terminal

3: Plated:


Q: Tin Plated

A1: Gold 5u" plated on contact Area,
Bright Tin plated on Solder Area


A2: Gold 30u" plated on contact Area,
Bright Tin plated on Solder Area

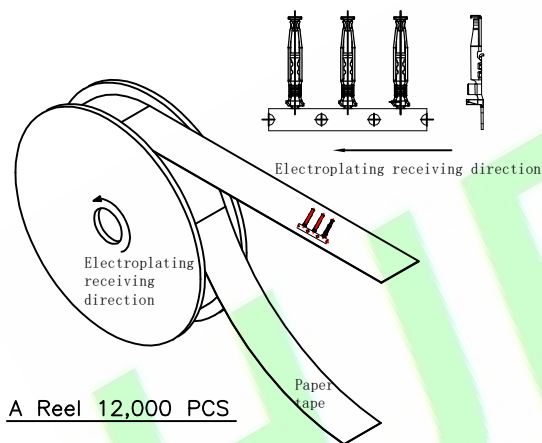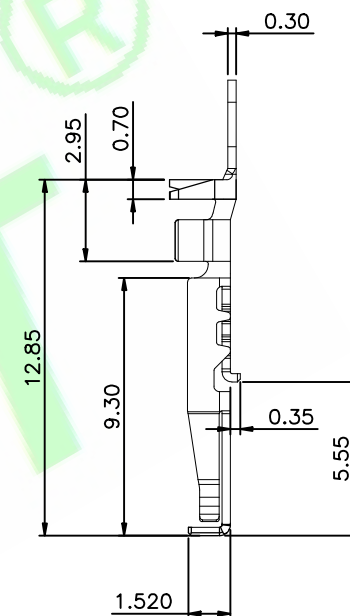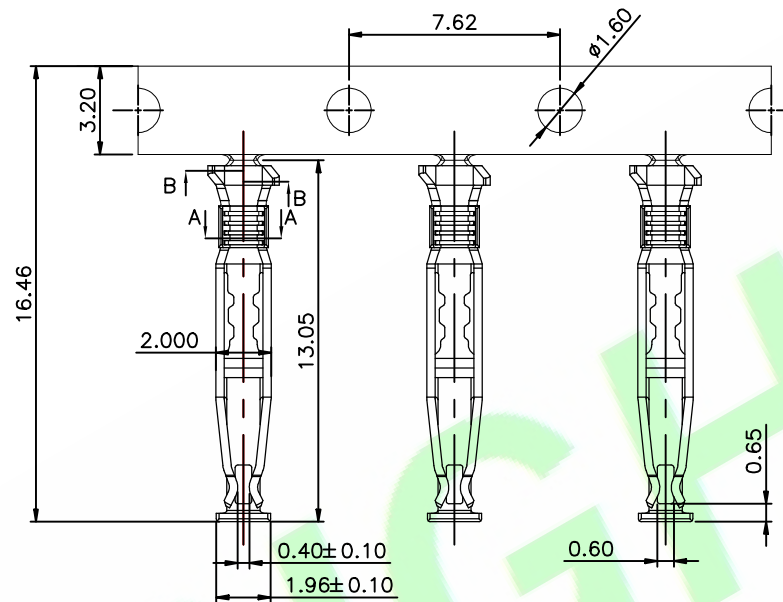

SEC: B-B



SEC: A-A

				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : M2540T-PXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
					LINEAR	ANGLES	DWG. NO.:				
3X	Add plating option	Judyyan	20240823	CHKD.: Mike	X.: ±	X': ±6.0°	TITLE : 2.54 SRC-A Teriminal		SHEET: 1/1		A4
2X	Update the description	Judyyan	20221022		X.X: ±0.25	X.X': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Aaron		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.08	X.XXX': ±2.0°	DATE: 04-Jun-2021				