

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:BLACK

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M Ohm min.

Dielectric Voltage:500V AC/Minute

Ordering Information

PCI080M-10X-03-M-E2

1	2	3	4	5	6
---	---	---	---	---	---

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Gold flash on contact;Matte Tin on tail

I:1u" Gold on contact;Gold flash on tail

J:3u" Gold on contact;Gold flash on tail

C:5u" Gold on contact;Gold flash on tail

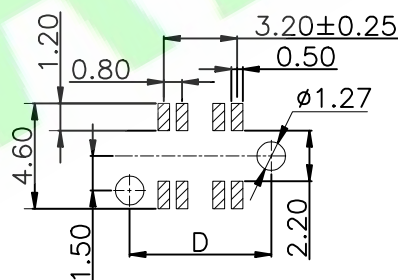
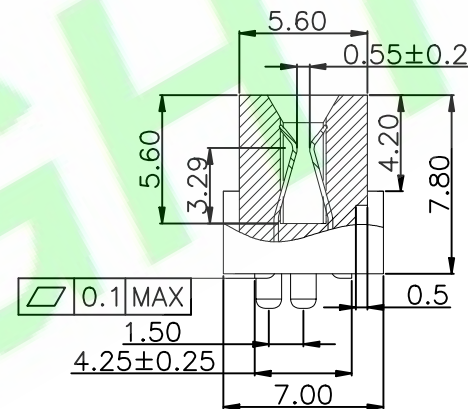



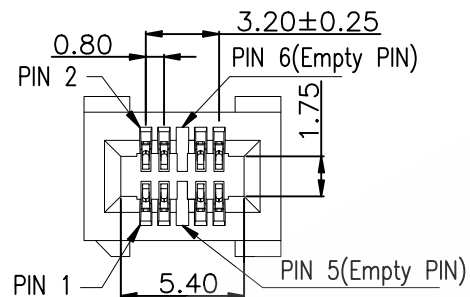
D:10u" Gold on contact;Gold flash on tail

K:15u" Gold on contact;Gold flash on tail

P:30u" Gold on contact;Gold flash on tail

5:— M:W/Mylar In Tape&Reel

6:— E2:Empty 2Pin

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : PCI080M-10X-03-M-E2	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	X.:	X': ±5.0°	TITLE : 0.8mm Pitch BTB Female	
	X.X: ±0.35	X.X': ±3.0°		
APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°	DATE: 18-Apr-2023	
	X.XXX: ±0.15	X.XXX': ±1.0°		


HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.