

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor Bronze,

Plated:See Ordering Information

Rating:

Current Rating:3 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

PCI080M-XXX-02-X

1 2 3 4 5

1: — Series No.

2: — M:SMT Type

3: — No. of Positions

4: — H:Gold flash on contact;Matte Tin on tail

E:3u" Gold on contact;Matte Tin on tail

B:5u" Gold on contact;Matte Tin on tail

T:10u" Gold on contact;Matte Tin on tail

L:15u" Gold on contact;Matte Tin on tail

Y:30u" Gold on contact;Matte Tin on tail

5: — C: In Tray

M:W/Mylar In Tape&Reel


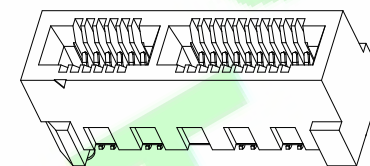
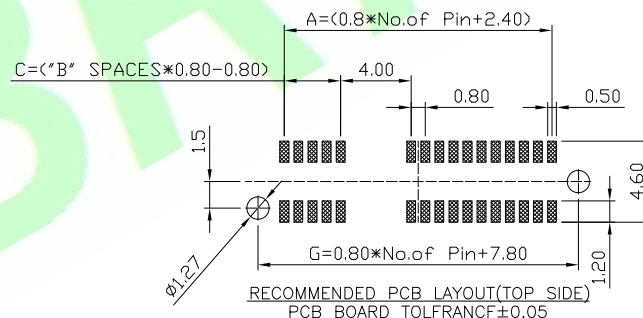
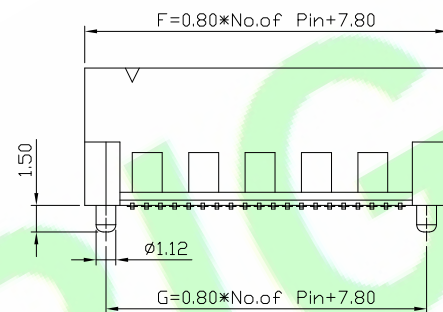
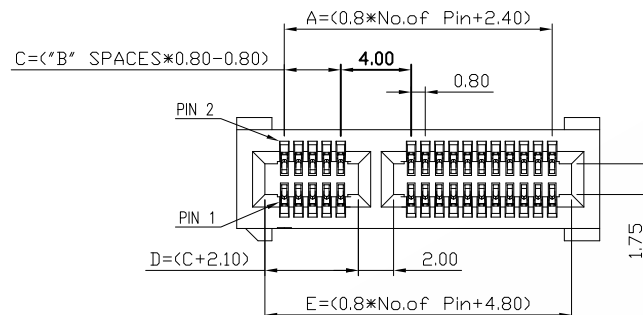


TABLE1:


No. OF PIN	A	B	C	D	E	F	G
026:2x13PIN	12.80	5	3.20	5.30	15.00	18.20	15.80
030:2x15PIN	14.40	5	3.20	5.30	16.60	19.80	17.40
050:2x25PIN	22.40	5	3.20	5.30	24.60	27.80	25.40
074:2x37PIN	32.00	20	15.20	17.30	34.20	37.40	35.00
080:2x40PIN	34.40	21	16.00	18.10	36.60	39.80	37.40
098:2x49PIN	41.60	26	20.00	22.10	43.80	47.00	44.60
100:2x50PIN	42.40	26	20.00	22.10	44.60	47.80	45.40
120:2x60PIN	50.40	31	24.00	26.10	52.60	55.80	53.40
140:2x70PIN	58.40	31	24.00	26.10	60.60	63.80	61.40
160:2x80PIN	66.40	31	24.00	26.10	68.60	71.80	69.40
180:2x90PIN	74.40	31	24.00	26.10	76.60	79.80	77.40
200:2x100PIN	82.40	31	24.00	26.10	84.60	87.80	85.40
200:2x100PIN	82.40	50	39.20	41.30	84.60	87.80	85.40

5X			
4X			
3X			
2X	New packaging options	Deng	20230530
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.25	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : PCI080M-XXX-02-X
DWG. NO.:
TITLE : 0.8mm PCI 金手指 180° SMT 帶隔栏 C形焊脚
DATE: 15-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		