

RoHS Compliant

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:BLACK

Contact: Copper Alloy

Rating:

Current Rating:2.0 Amp

Voltage Rating:1A.250V AC

Operating Temperature Range:-55~+85°C

Wave Soldering temperature:

Lead Part:245±5°C,5sec

RoHS Part:260±5°C,5sec

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

PCI127S-68L95-02-F

1 2 3 4 5





1: Series No.

2: S: Straight Type

3: No. of Positions(68)

4: L: Gold 30u", Gold Flash&Tin Plated

5: F: W/Cap In Tape&Reel

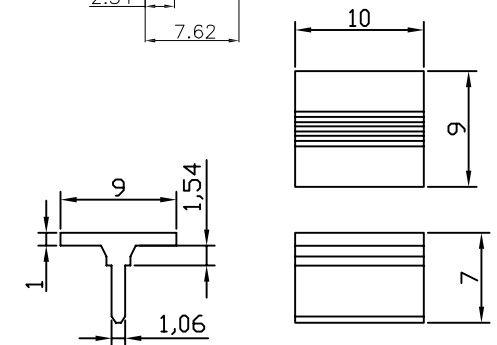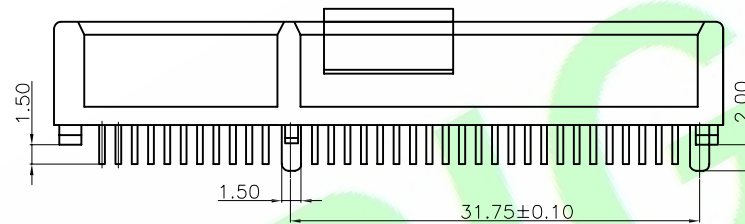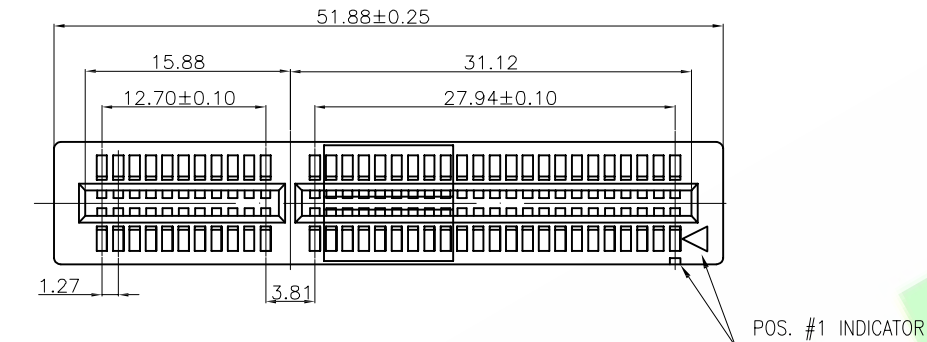

TOP VIEW
PCB LAYOUT RECOMMENDED

Part No.	Package	
	Cap In Tape&Reel: ø340mm*72mm	Box: 340mm*340mm*345mm
PCI127S-68L95-02-F	250 PCS	1000pcs

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : PCI127S-68L95-02-F	C+S GmbH	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : SLOT PCI EXPRESS	SHEET: 1/1	THIRD ANGLE PROJECTION
2X				APPD.: Billy	X.X: ±0.20	X.X': ±3.0°	DATE: 29-Aug-2017	SCALE: 1:1	
1X	ORIGINAL	Aaron			X.XX: ±0.20	X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX:	X.XXX': ±1.0°			A4