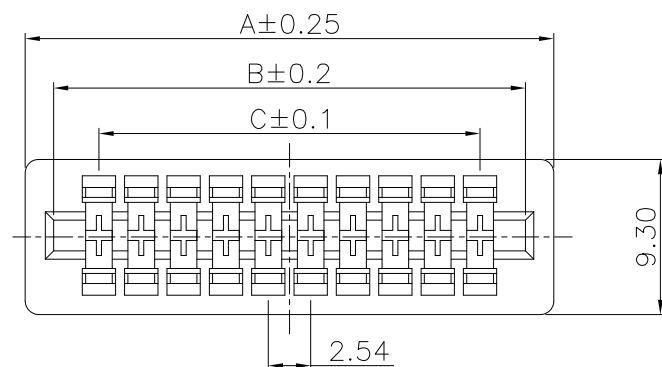
**Specifications:****Material And Finish:**

Insulator:Glass filled PBT UL94V-0

Insulator Color:Black

Contact:Brass or Phosphor Bronze

Plated:Contact Gold and Solder tail Tin Plated Over Ni

Rating:

Current Rating:2.0 Amp

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:30m Ohm Max at DC 100mA

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V DC/Minute

Ordering Information & Dimensions

NO.	Dimensions			NO.	Dimensions		
	A	B	C		A	B	C
04P	11.38	7.98	2.54	36P	52.02	48.62	43.18
06P	13.92	10.52	5.08	40P	57.10	53.70	48.26
08P	16.46	13.06	7.62	44P	62.18	58.78	53.34
12P	19.00	15.60	10.16	50P	69.80	66.40	60.96
14P	24.08	20.68	15.24	60P	82.50	79.10	73.66
20P	31.70	28.30	22.86	62P	85.04	81.64	76.20
22P	34.24	30.84	25.40	72P	97.74	94.34	88.90
24P	36.78	33.38	27.94	98P	138.38	134.98	129.54
26P	39.32	35.92	30.48				
30P	44.40	41.00	35.56				

Ordering Information

PC1254S-XXH093-002B

1 2 3 4

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — H: Gold on contact;
Matte Tin on tail

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : PCI254S-XXH093-002B	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: x.x: ±0.20	x': ±5.0° x.x': ±3.0°	TITLE : 2.54mm SLOT 180°			
2X				APPD.: Billy	x.xx: ±0.15	x.xxx: ±1.0° x.x': ±2.0°	DATE: 11-Dec-2019			
1X	ORIGINAL	Sophia								
REV.	DESCRIPTION	DR.BY	ECN. NO.							