

RoHS Compliant

Specifications:




Insulator:PC UL94V-0 Color:Natural
Current Rating:70 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:8KV
Mating cycles:500 cycles


Ordering Information

PM1480KM-01G-01-XA

1	2	3	4 5
---	---	---	-----

- 1:—Series No.
2:—KM:Housing Male
3:—01G:Grounding PIN
4:—P:PBT
PC:PC
5:—A:In Bag

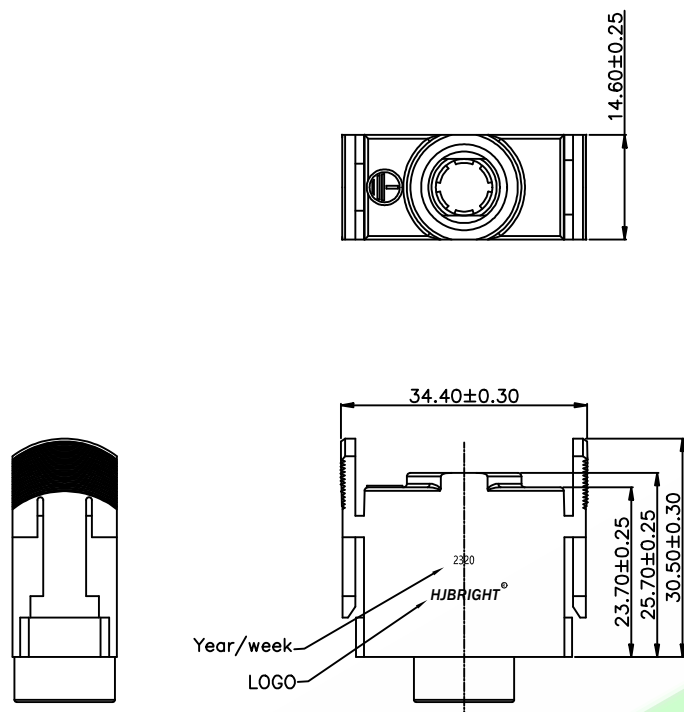

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480KM-01G-01-XA	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES				
3X				CHKD.: kang	x.: ±0.30	x': ±5.0°	TITLE : 公座地线PIN塑胶	SHEET: 1/1			A4
2X					x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	kang		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 17-Aug-2023				