




Specifications:

Insulator:PC UL94V-0 Color:Natural
Current Rating:10 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:4KV
Mating cycles:500 cycles
Wire range:18~16AWG)

Ordering Information

PM1480KM-12-XX-XA

1	2	3	4	5 6	
1: Series No.	2: KF:Housing Male	3: 12:12P:Signal Pin	4: 01:01 Type 02:02 Type	5: P:PBT PC:PC	6: A:In Bag

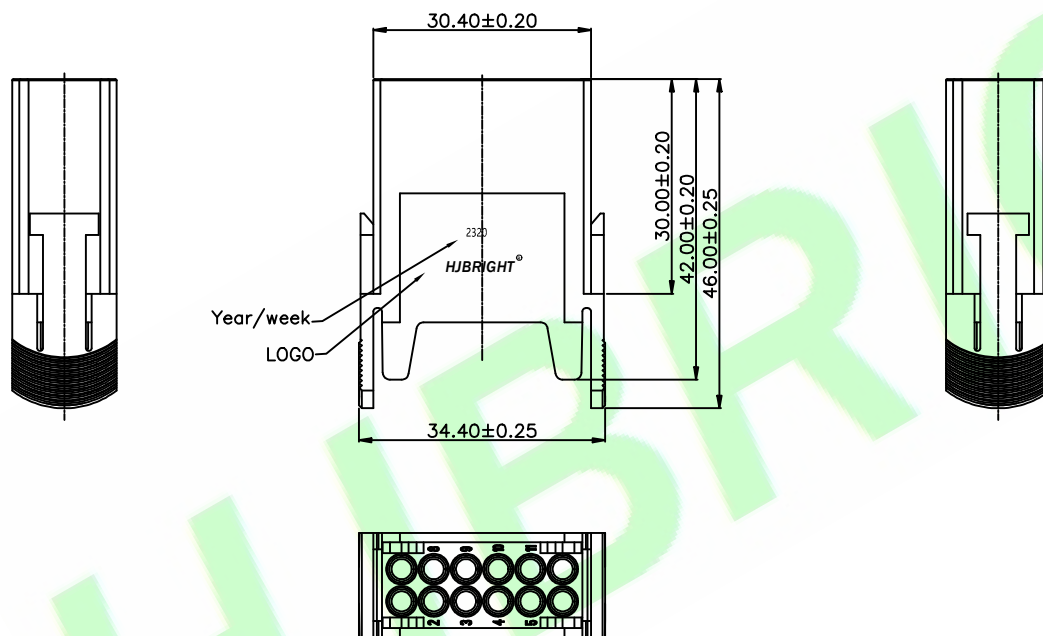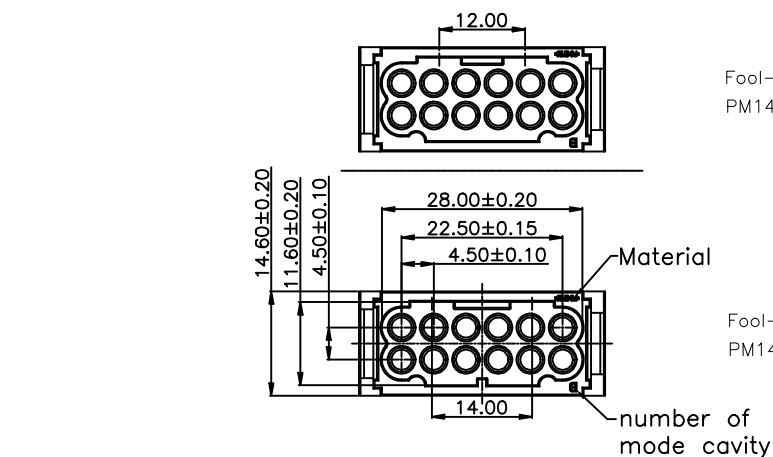

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480KM-12-XX-XA	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				kang	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: kang	X.: ±0.30	X': ±5.0°	TITLE :	4.50mm Pitch 公座信号PIN塑胶		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X				APPD.: Billy	X.X: ±0.25	X.X': ±3.0°	DATE: 17-Aug-2023			UNIT: mm		
1X	ORIGINAL	kang			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						