


Specifications:

Insulator:PC UL94V-0 Color:Natural
Mating cycles:500

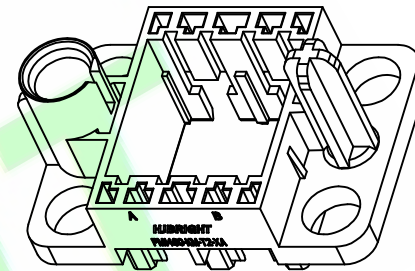

Ordering Information

PM1480KM-T2-XA
1 2 3 4 5

- 1: Series No.
2: KM:Housing Male
3: TX:T2~T8(Circuits)
4: P:PBT
PC:PC
5: A:In Bag




SPACING OF TWO PANELS
AT CLOSE STATUS







THIRD ANGLE PROJECTION

A4

Circuits	Dimensions			
	A	B	C	D
02	14.80	48.60	64.60	38.60
03	29.60	63.40	79.40	53.40
04	44.40	78.20	94.20	68.20
05	59.20	93.00	109.00	83.00
06	74.00	107.80	123.80	97.80
07	88.80	122.60	138.60	112.60
08	103.60	137.40	153.40	127.40

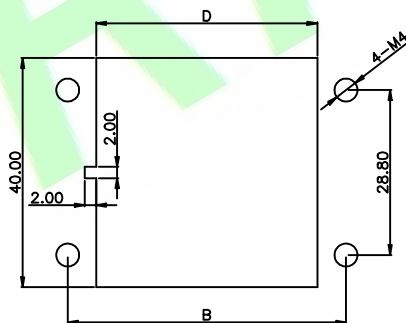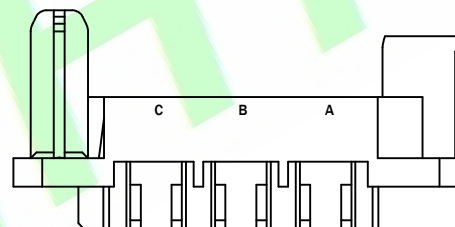

PANEL CUT OUT

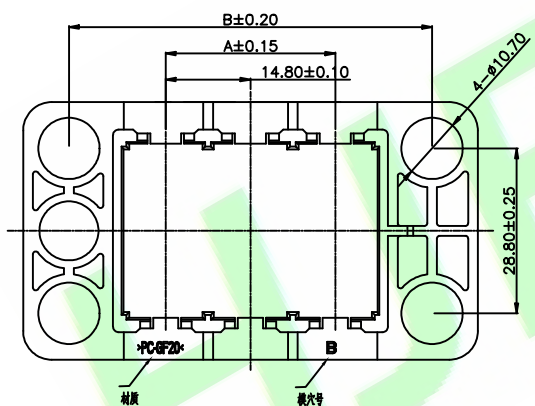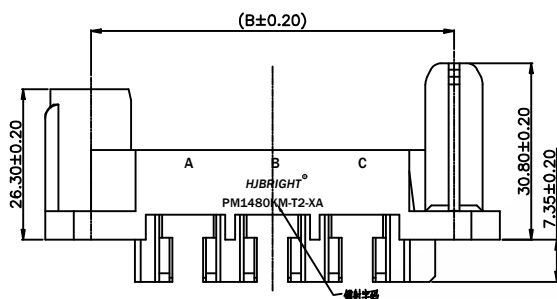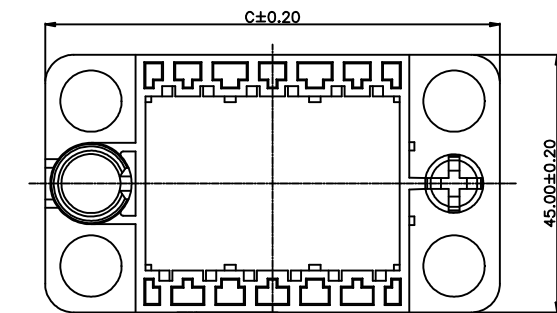

5X				DR.BY.:	
4X				kang	
3X				CHKD.:	
2X				kang	
1X	ORIGINAL	kang		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:		PART NO : PM1480KM-T2-XA
LINEAR	ANGLES	
X.: ±0.30	X': ±5.0°	DWG. NO.:
X.X: ±0.25	X.X': ±3.0°	
X.XX: ±0.15	X.XX': ±2.0°	TITLE :
X.XXX: ±0.10	X.XXX': ±1.0°	
		14.8mm Pitch 公座外框塑胶
		DATE: 17-Aug-2023

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm