



RoHS Compliant

Specifications:

Material: T2
Mating cycles: 500
Current Rating: 70 Amp


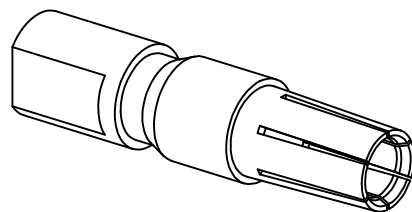


Ordering Information

PM1480TF-01G-GX

1 2 3 4 5

- 1: — Series No.
2: — TF:Female Terminal
3: — 01G:Grounding PIN
4: — G:high conductivity copper
5: — AG:Silvering Plated
S:Matte Tin Plated
Q:Tin Plated

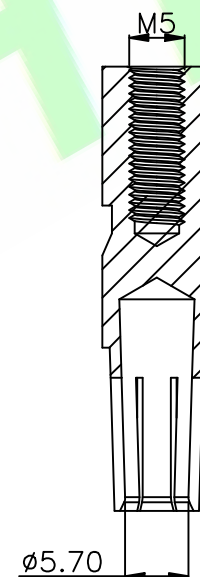

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480TF-01G-GX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  A4		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: kang	X.:	X':	TITLE : 接地PIN母針			
2X					X.X: ±0.20	X.X':				
1X	ORIGINAL	kang		APPD.:	X.XX: ±0.10	X.XX':				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX:±0.05	X.XXX':	DATE: 17-Aug-2023			