

RoHS Compliant






Specifications:

Material: T2
Mating cycles: 500
Current Rating: 70 Amp

Ordering Information

PM1480TF-01P-GX
1 2 3 4 5

- 1: — Series No.
2: — TF:Female Terminal
3: — 01P:Power PIN
4: — G:high conductivity copper
5: — AG:Silvering Plated
S:Matte Tin Plated
Q:Tin Plated

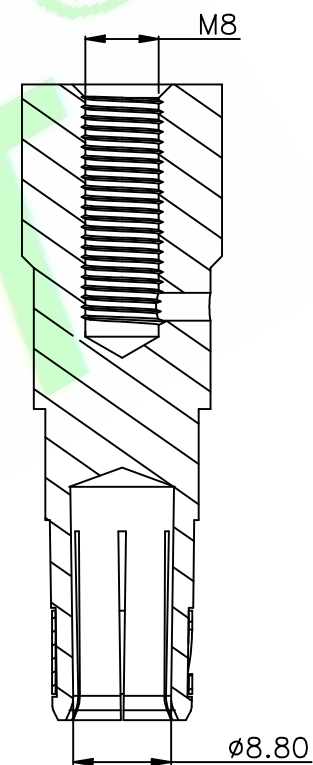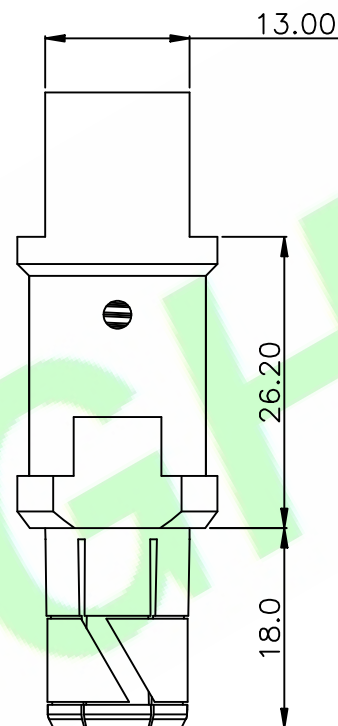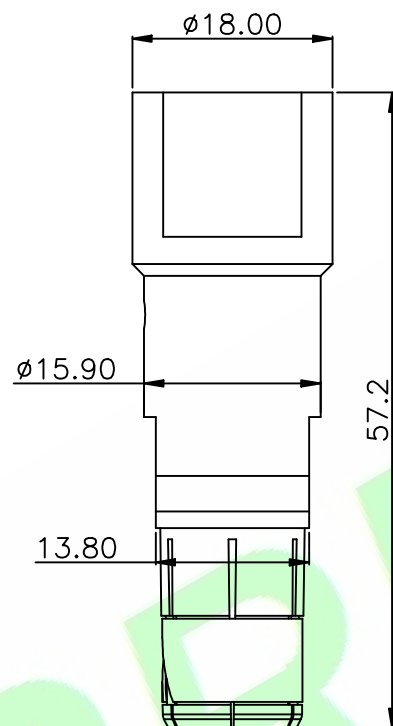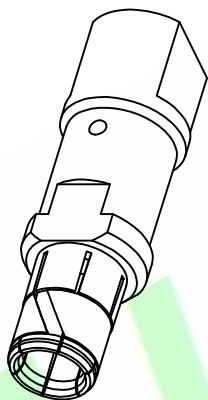


5X			
4X			
3X			
2X			
1X	ORIGINAL	kang	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: kang
CHKD.: kang
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.20	X':
X.X: ±0.10	X.X':
X.XX: ±0.05	X.XX':

PART NO : PM1480TF-01P-GX
DWG. NO.:
TITLE : 电源PIN母针
DATE: 17-Aug-2023

HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		