


RoHS Compliant




Specifications:

Material: T2
 Mating cycles: 500
 Current Rating: 70 Amp

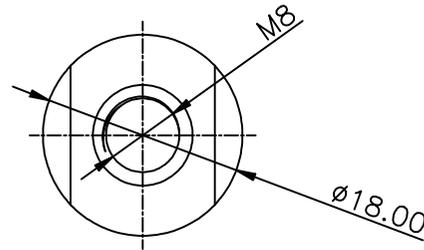

Ordering Information
 PM1480TM-01P-XX


- 1: — Series No.
- 2: — TM:Male Terminal
- 3: — 01P:Power PIN
- 4: — G:high conductivity copper
- 5: — AG:Silvering Plated
 S:Matte Tin Plated
 Q:Tin Plated

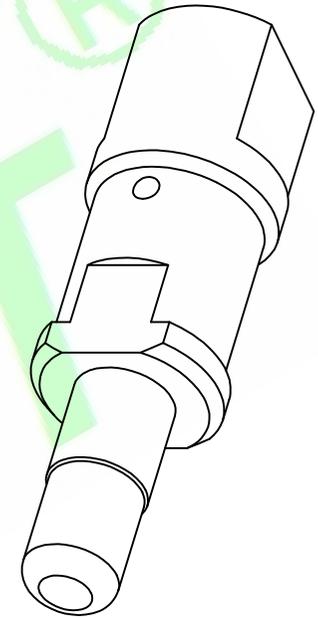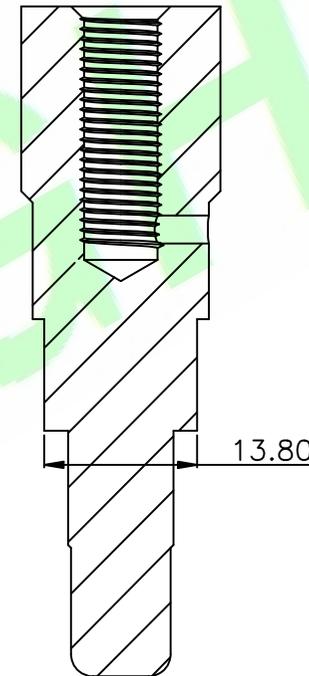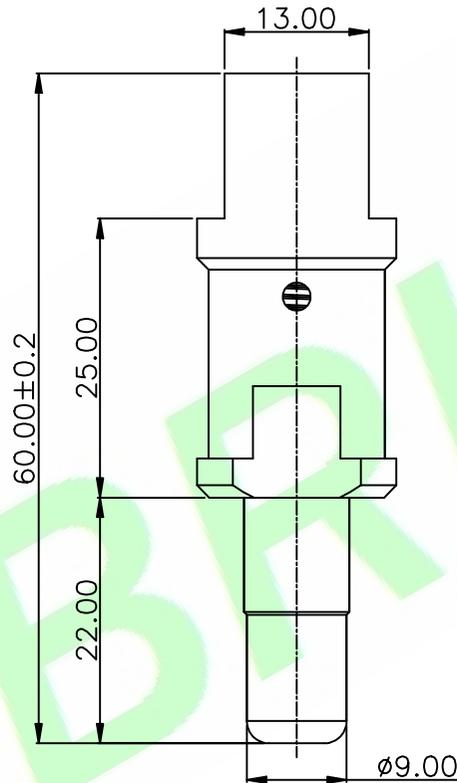

| | | | | | | | | |
|------|-------------|-------|----------|--------------|--------------------|---------|---------------------------|--|
| 5X | | | | DR.BY.: kang | GENERAL TOLERANCE: | | PART NO : PM1480TM-01P-GX | |
| 4X | | | | CHKD.: kang | LINEAR | ANGLES | DWG. NO.: | |
| 3X | | | | APPD.: Billy | X.: | X': | TITLE : | |
| 2X | ORIGINAL | kang | | | X.X: ±0.20 | X.X': | 电源PIN公针 | |
| 1X | DESCRIPTION | DR.BY | ECN. NO. | | X.XX: ±0.1 | X.XX': | DATE: 17-Aug-2023 | |
| REV. | | | | | X.XXX:±0.05 | X.XXX': | UNIT: mm | |

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4