

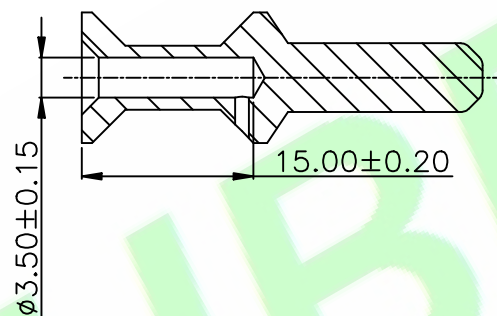



Specifications:

Insulator:C14500

Mating cycles:500

Stripping length(mm):15

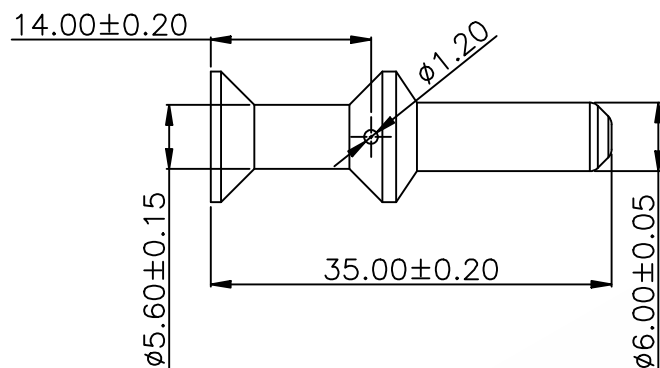


Ordering Information

PM1480TM-02P-XX

1 2 3 4 5

- 1:— Series No.
2:— TM:Male Terminal
3:— 02P:Power PIN
4:— B:Brass
P:Phosphor copper
G:high conductivity copper
5:— AG:Silvering Plated
S:Matte Tin Plated
Q:Tin Plated

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480TM-02P-XX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: kang	X.: ±0.30	X': ±5.0°	TITLE :	14.0mm Pitch 公针素材		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X					X.X: ±0.25	X.X': ±3.0°		DATE: 17-Aug-2023		UNIT: mm		
1X	ORIGINAL	kang		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						