

RoHS Compliant

**Specifications:****Material And Finish:**

Insulator:LCP UL94V-0 Color:BLACK
Contact:High Conductivity Copper Alloy
Plated:See Ordering Informtaion

Rating:

Current Rating:
Power Contact:130A Max
Voltage Rating:
Power module:125AC/DC
Operating Temperature Range:-40°~+105°C

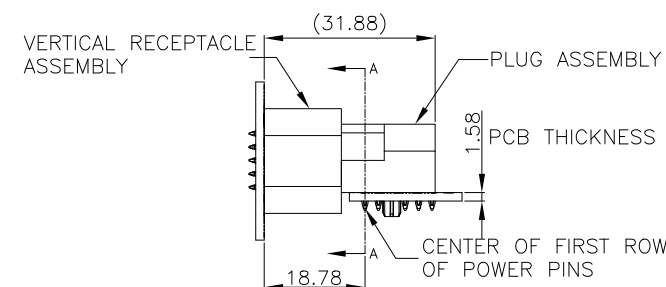
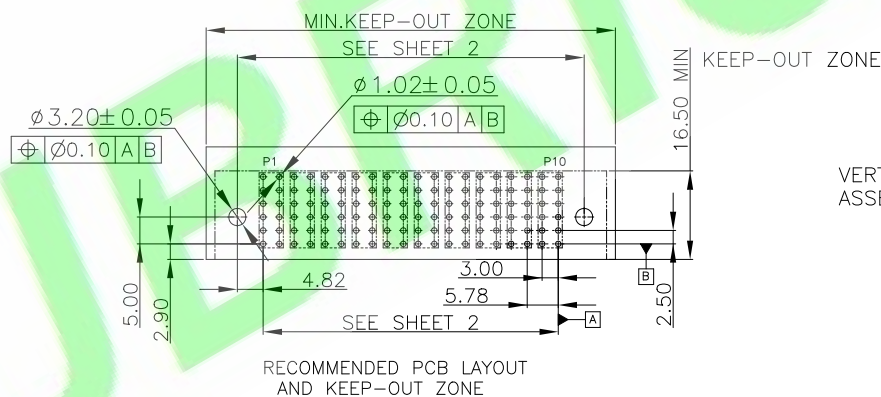
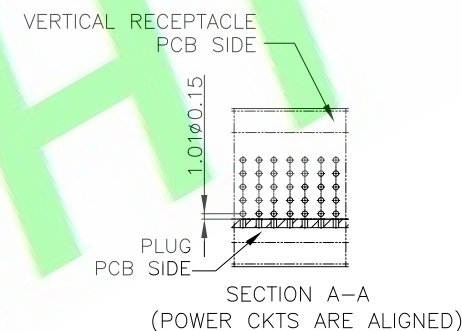
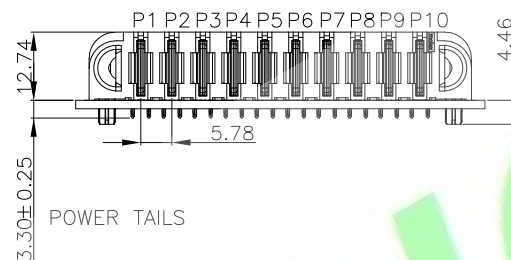
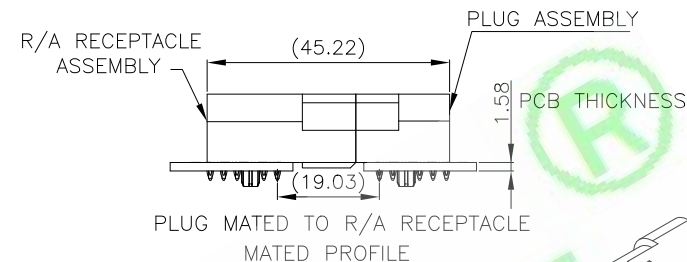
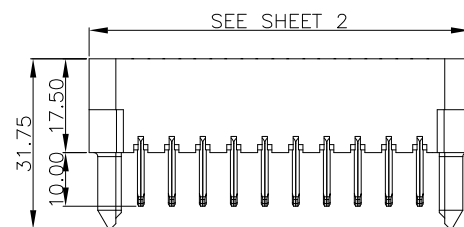
Electrical:

Contact resistance:
Power Contact 0.38m Ohm Max
Insulator resistance:5000M ohm min
Withstanding Voltage:1500V AC/Minute

Ordering Information

PM57800R-XXMY-01-C
1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — M:Male
5: — Y:30u"Gold on Contact;
Selective Tin on tail
6: — C:In Tray



DR.BY.: xiao	GENERAL TOLERANCE:		PART NO : PM57800R-XXMY-01-C DWG. NO.: TITLE : POWER PIN AND SIGNAL PIN R/A PLUG ASSY-TEN60 POWER FAMILY DATE: 07-Dec-2024
	LINEAR	ANGLES	
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	
	x.x: ±0.25	x.x': ±3.0°	
APPD.: Billy	x.xx: ±0.13	x.xx': ±2.0°	
	x.xxx: ±0.10	x.xxx': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED







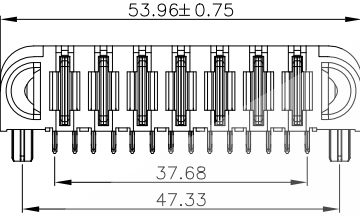
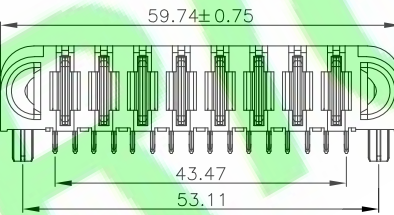
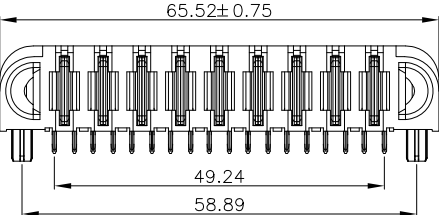
SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	xiao	
REV.	DESCRIPTION	DR.BY	ECN. NO

1		2		3		4		5		6		7		8	
SHEET 2		PIN1				PIN2				PIN3		RoHS Compliant		Automobile Product	
A															
B		PIN4				PIN5				PIN6					
C															
D		PIN7				PIN8				PIN9					
E															
		PIN10													
		