

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S12711S-XXX34-X

1 2 3 4 5

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

H: Selective Gold Plated



Q: Tin Plated

5:— A: In bag


B: In Tube


C: In Tray

F: W/ Cap In Tape & Reel

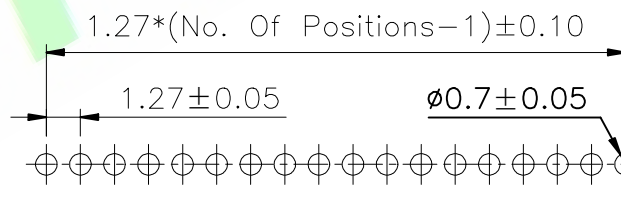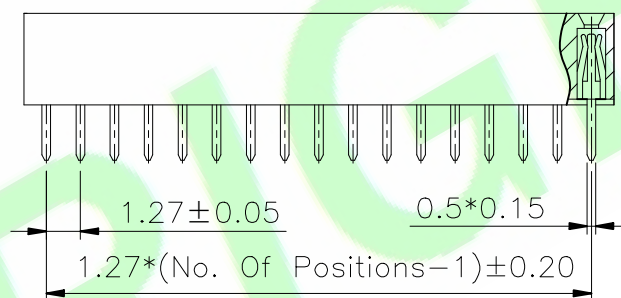

Recommended PCB Layout

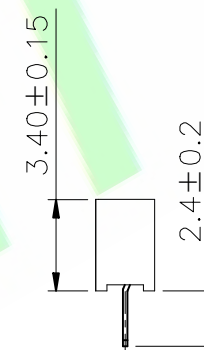

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12711S-XXX34-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES				
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header Straight Type			
	x.x: ±0.20	x.x': ±3.0°				
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°				
	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 30-Jun-2008	SHEET: 1/1		A4
				SCALE: 1:1		
				UNIT: mm		