




Material And Finish:
Insulator:Nylon 6T UL94V-0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information

Current Rating:1.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C



Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

S12721M - XXX43 - XXX
1 2 3 4 5 6 7

1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:A Type
B:B Type
5:— 0:With Out Peg
1:With Peg
5:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

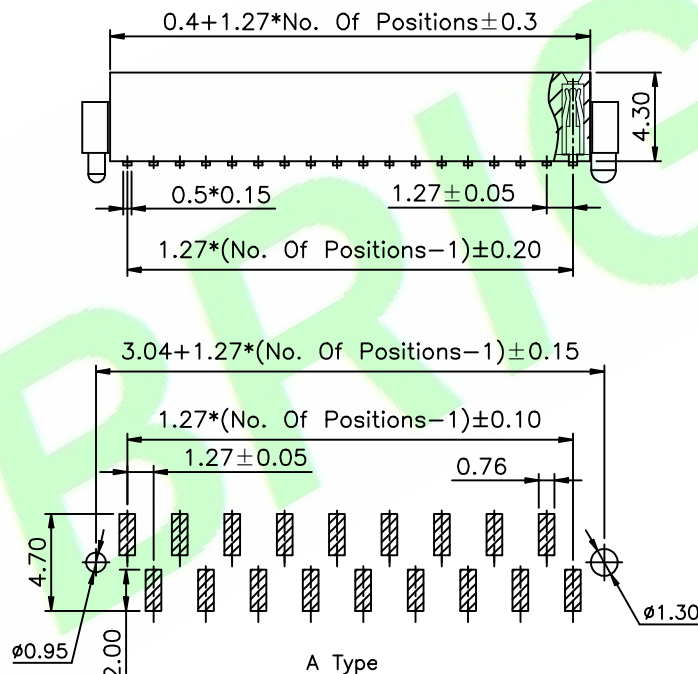

Recommended PCB Layout(Tolerance:0.05mm)

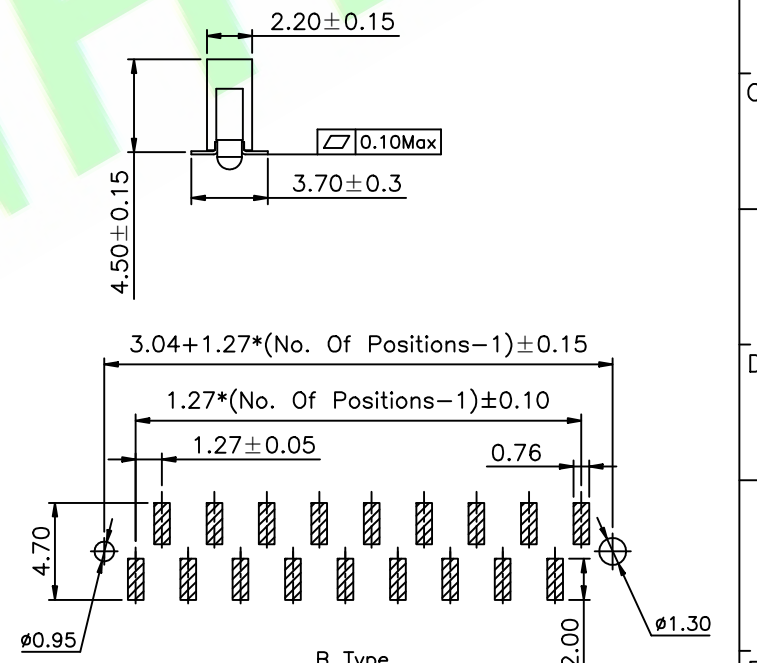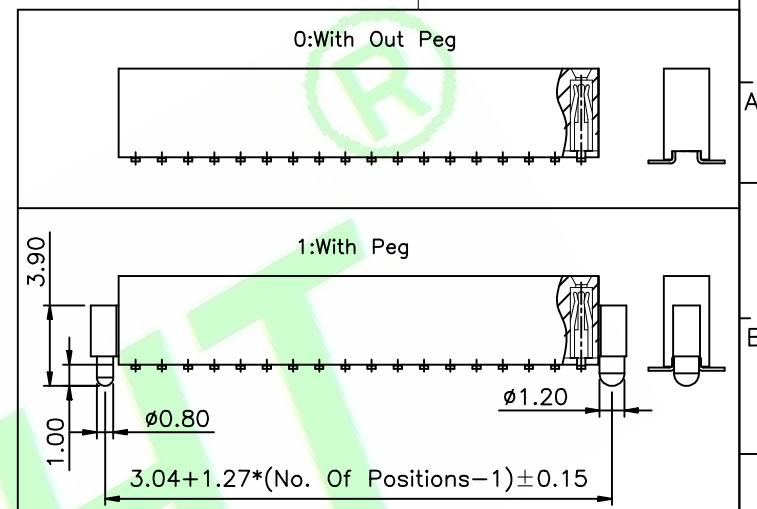

Recommended PCB Layout(Tolerance:0.05mm)

				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12721M-XXX43-XXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
					LINEAR	ANGLES	DWG. NO.:				
2X	Update code options	Judyyan	20240709	CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type		SHEET: 1/1		A4
1X	ORIGINAL	Samson			X.X: ±0.20	X.X': ±3.0°			SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 30-Jun-2008	UNIT: mm	THIRD ANGLE PROJECTION		
					X.XXX: ±0.10	X.XXX': ±1.0°					