RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA6T UL94V-0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information

Rating:
Current Rating:2.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

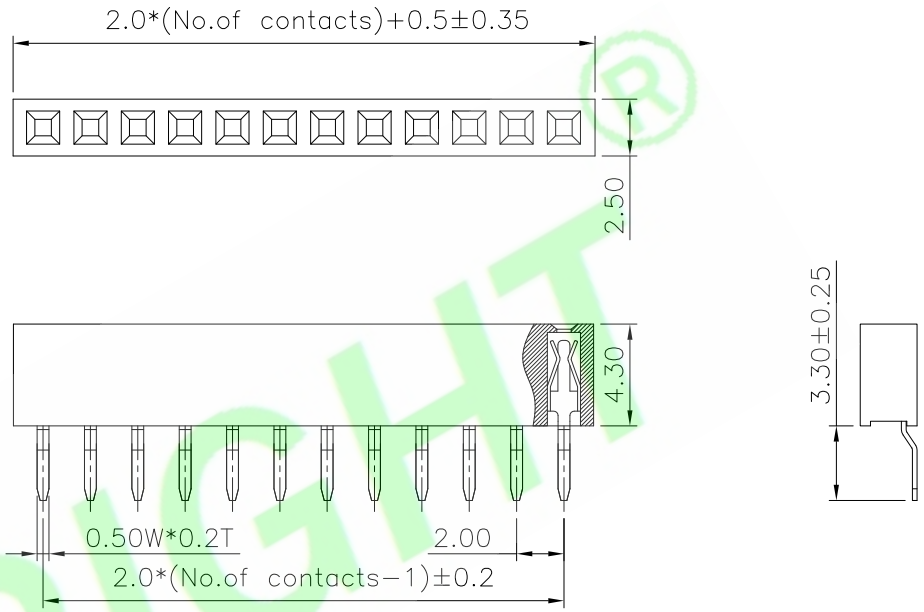

Ordering Information
S20041H-XXX43-NX
1 2 3 4 5

1: —— Series No.
2: —— H:Horizontal SMT Type
3: —— No. of Positions
4: —— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: —— A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

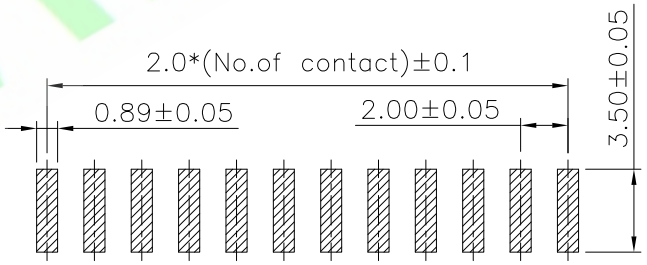

Recommended PCB Layout

HJBRIGHT®

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X			
1X	ORIGINAL	Jack	

DR.BY.: Jack
CHKD.: Kenry
APPD.: Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X.:		X°:	±5.0°
X.X:	±0.30	X.X°:	±3.0°
X.XX:	±0.25	X.XX°:	±2.0°
X.XXX:	±0.05	X.XXX°:	±1.0°

PART NO : S20041H-XXX43-NX
DWG. NO.:
TITLE : 2.0mm Pitch PCB Socket Header Horizontal SMT Type
DATE: 11-Sep-2015

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4