

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S20242R-XXX63B-NX

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type

3: — No. of Positions(02-80)

4: — A:Gold Flash


Q: Tin Plated

5: — N:Nylon 6T

6: — A:In bag

B:In Tube

C:In Tray

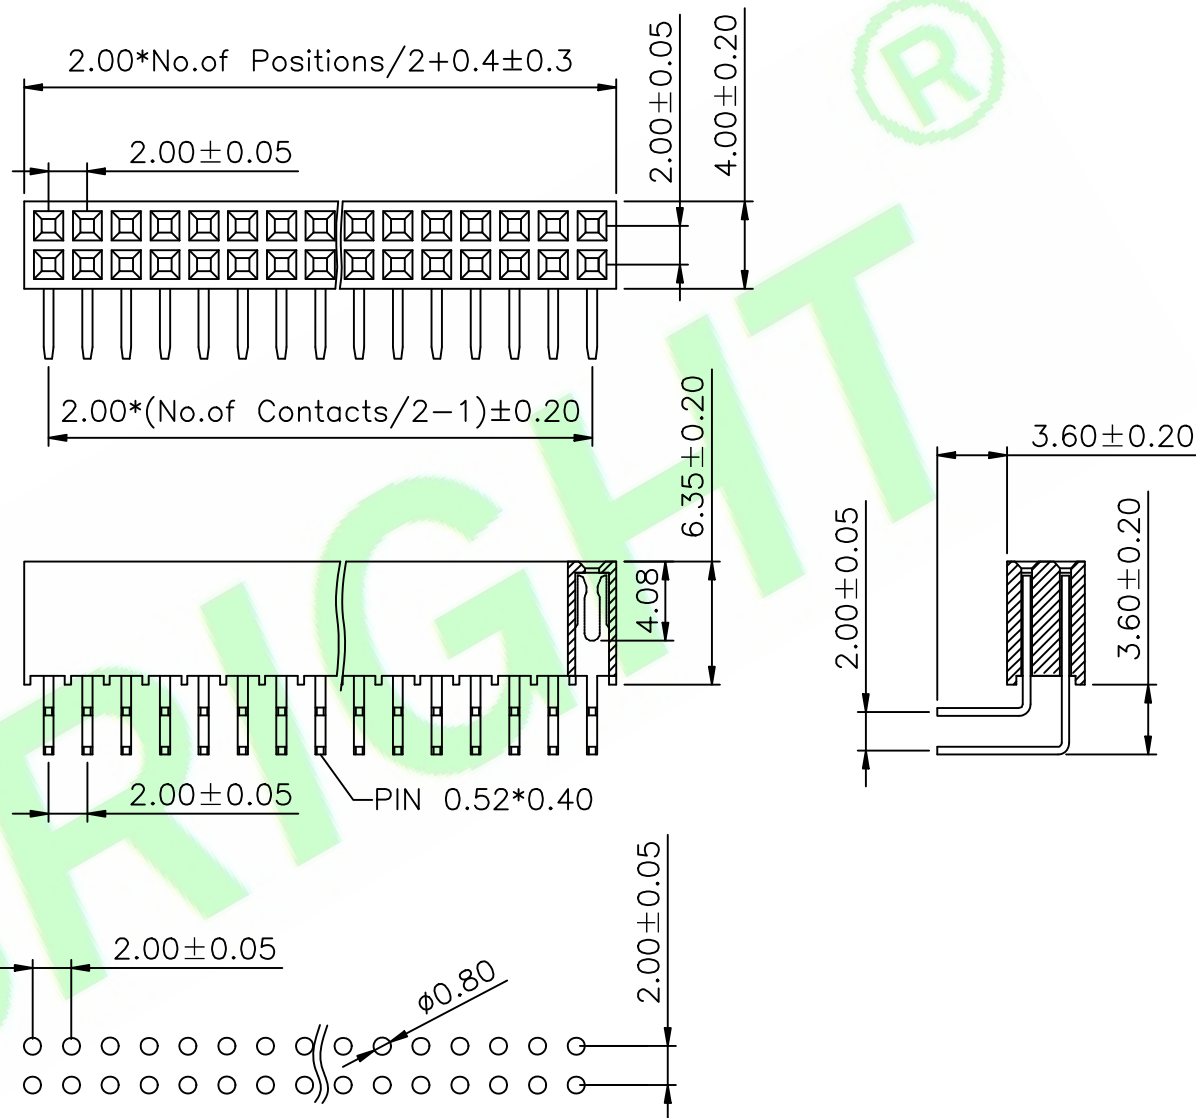

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S20242R-XXX63B-NX		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.0mm Pitch PCB Socket Header R/A Type		SHEET: 1/1			A4
2X	Add Dim	Sophia	2020/05/05		x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 23-Jul-2013		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10			x.xxx°: ±1.0°			