


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\begin{array}{ccccccc} \overline{} & \overline{} & \overline{} & \overline{} & & \overline{} & \overline{} \\ 1 & 2 & 3 & 4 & & 5 & 6 \end{array}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— O:W/O Locating PEG
1:With Locating PEG
6:— B:In Tube
E:Mylar In Tape&Reel
F:W/Cap In Tape&Reel

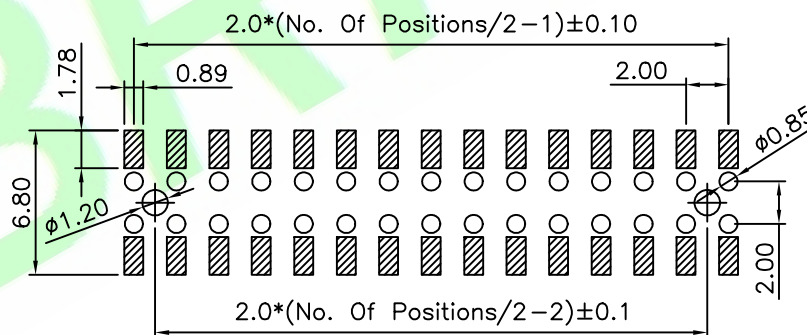

Recommended PCB Layout(Tolerance:0.05mm)



1:With Locating PEG

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION
A4	