

A

B

C

D

E



Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute


S25512M-XXX71-01-XX

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{56}$$

F:W/Cap In Tape&Reel

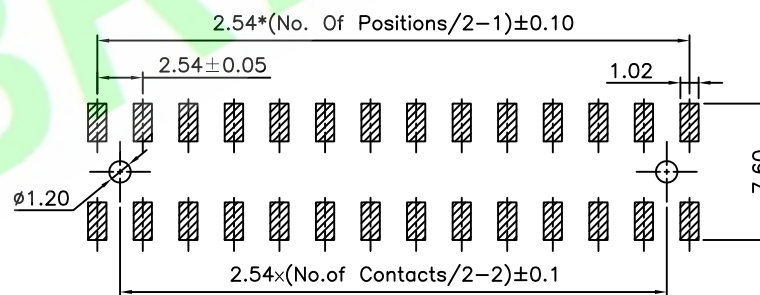

Recommended PCB Layout(Tolerance:0.05)



	1	2	3	4	5	6	7	8	
--	---	---	---	---	---	---	---	---	--