

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information**S25543S-XXX50-X**


1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray

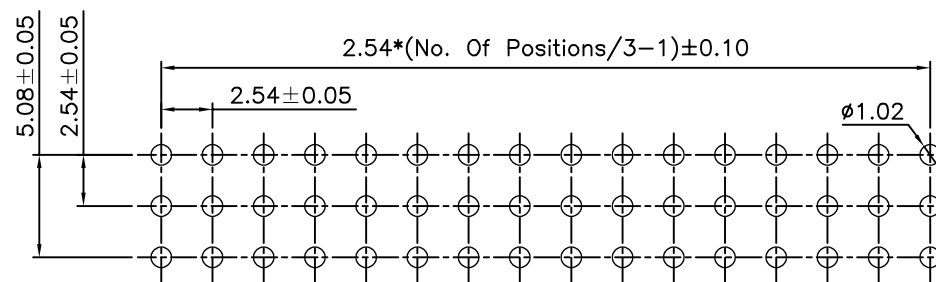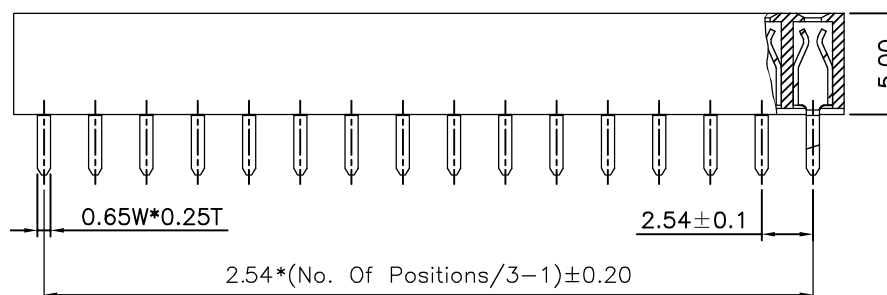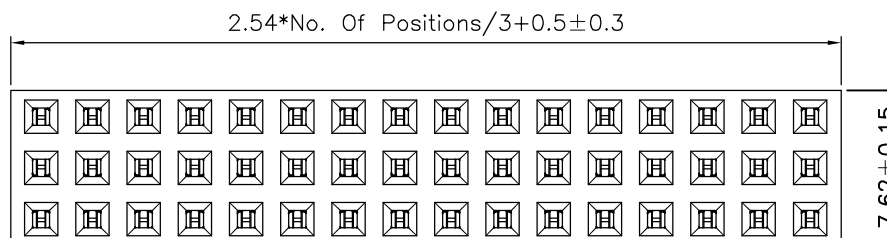

Recommended PCB Layout(Tolerance:0.05)

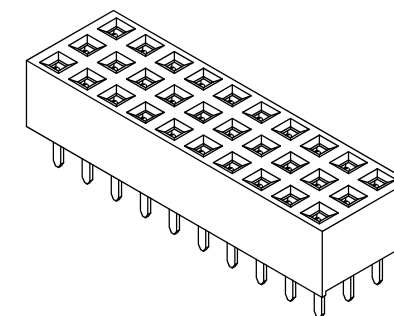

5X				DR.BY.: CHKD.: 朱 波	GENERAL TOLERANCE:		PART NO : S25543S-XXX50-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0807-159			
3X					APPD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type	SHEET: 1/1	
2X				x.x: ±0.20		x.x': ±3.0°	SCALE: 1:1			
1X	ORIGINAL	joy chen		x.xx: ±0.15		x.xx': ±2.0°	UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 14-JUL-2008	THIRD ANGLE PROJECTION		