

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S25551R-XXX50-NX**

1 2 3 4 5

- 1:—Series No.
2:—R/R/A Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—A:In bag
B:In Tube
C:In Tray

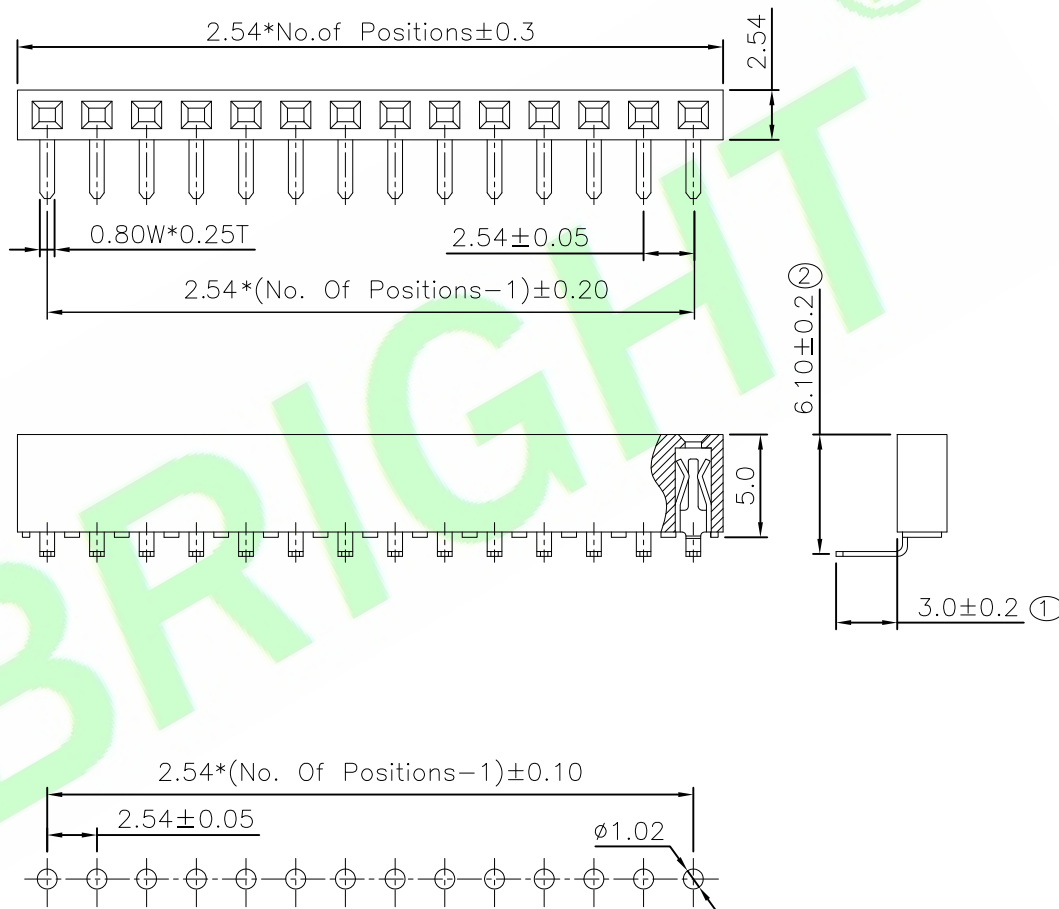

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S25551R-XXX50-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm THIRD ANGLE PROJECTION A4		
4X					CHKD.: Tony	LINEAR				
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X					x.x: ±0.20	x.x': ±3.0°	DATE: 16-Jul-2008			
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				