

Specifications:

Material And Finish:

Insulator:NY-6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated: See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S25572S-XXX35-NX

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

1:—Series No.

2:—— S: Straight Type

3:—No. of Positions

4:— A:Gold Flash






H:Selective Gold Plated

Q: Tin Plated

5:— A:In bag

B:In Tube

C:\n Tray

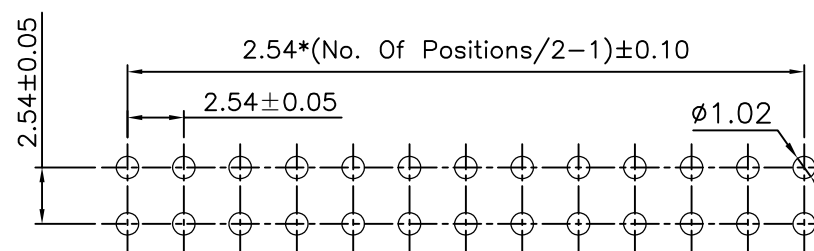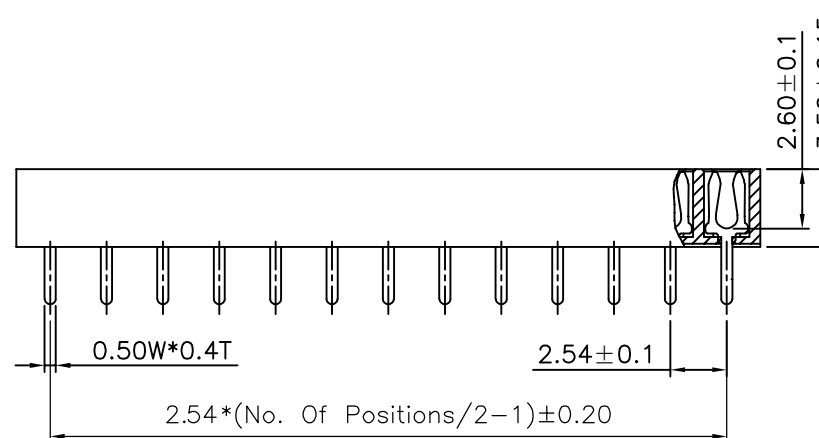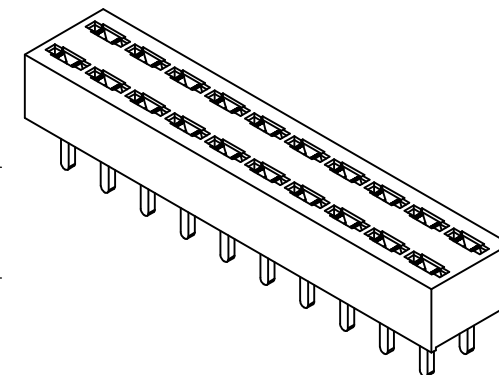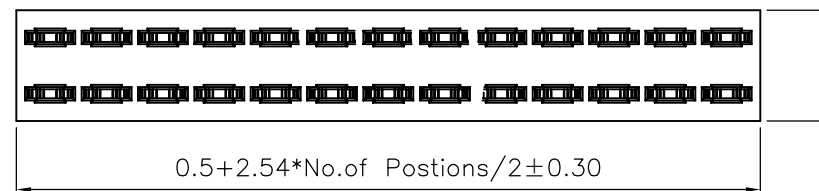

Recommended PCB Layout

5X				DR.BY.: CHKD.: 朱波 APPD.:	GENERAL TOLERANCE:		PART NO : S25572S-XXX35-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		A4
4X					LINEAR	ANGLES	DWG. NO.: RD0807-172			
3X					x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB			
2X					x.x: ±0.20	x.x': ±3.0°	Socket Header Straight Type			
1X	ORIGINAL	joy chen			x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 16-JUL-2008			
								SHEET: 1/1		
								SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	