

RoHS Compliant



Specifications:
Material: Copper alloy





Rating:
Current Rating: 25Amp MAX
Operating Temperature Range: $-40^{\circ}\sim +125^{\circ}\text{C}$

Ordering Information

T1719103-S-X


1 2 3

- 1: — Series No.
2: — S: Matte Tin Plated
3: — A: In Bag
R: Paper Reel
G: In Tape & Reel

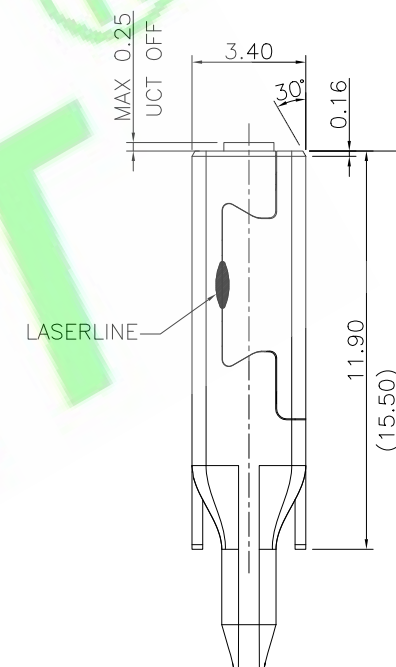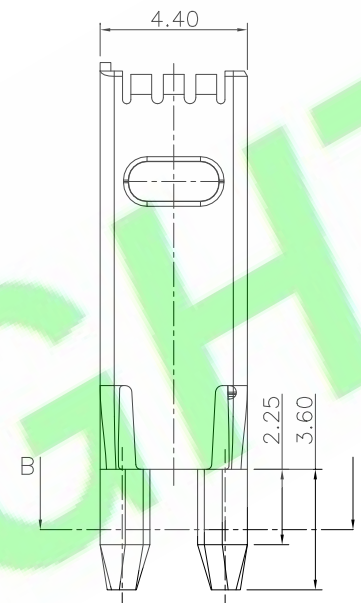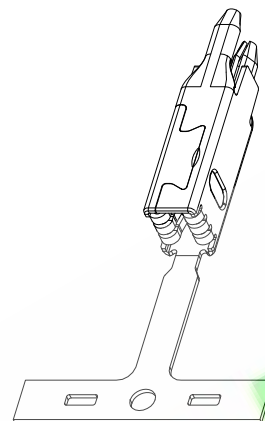


Packaging: ϕ 610 letterless paper tray,
with a packaging quantity of 3K Pcs per
tray

R: Paper Reel



G: In Tape & Reel

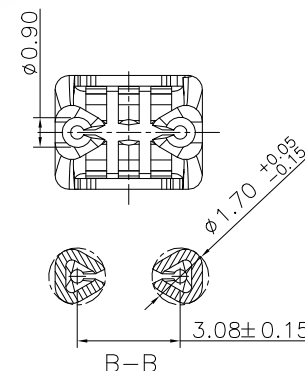

Recommended PCB Layout

				DR.BY.: XIAO	GENERAL TOLERANCE:		PART NO : T1719103-S-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:				
					APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : PCB 2.8 TERMINAL	SHEET: 1/1		A4
1X	ORIGINAL	XIAO		x.x: ±0.25		x.x': ±3.0°	DATE: 22-Sep-2021	SCALE: 1:1			
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm		THIRD ANGLE PROJECTION			
					x.xxx: ±0.10	x.xxx': ±1.0°					