

Connection Table: 6.35*0.8mm




Max voltage Temperature:600V 105℃

Packin Quantity:1500PCS/Reel

T250080M-01-SR-NBL

4

- 1: — Series No.
2: — M:Male Terminal
3: — S:Matte Tin Plated
4: — R:Continuous strip on reels
5: — Nylon 94v-2/Blue

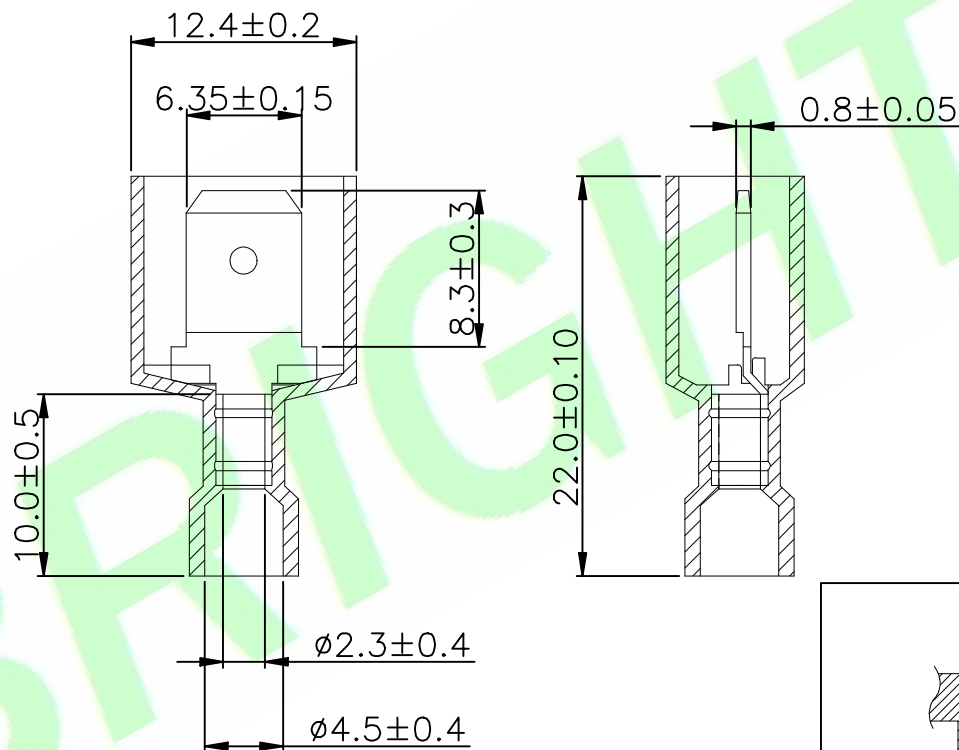

Material belt terminal

				DR.BY.: Judy्यान		GENERAL TOLERANCE: LINEAR ANGLES		PART NO : T250080M-01-SR-NBL		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Aren		X.: ±0.30 X': ±5.0° X.X: ±0.25 X.X': ±3.0°		DWG. NO.:							
				APPD.: Billy		X.XX: ±0.15 X.XX': ±2.0° X.XXX: ±0.10 X.XXX': ±1.0°		TITLE : Insulated Terminal Connection Blue							
1X	ORIGINAL			Judy्यान						SHEET: 1/1			A4		
REV	DESCRIPTION			DR.BY	ECN. NO.					SCALE: 1:1					
								DATE: 10-Apr-2023		UNIT: mm				THIRD ANGLE PROJECTION	
1		2		3		4		5		6		7		8	