

REACH SVHC(235) Compliant

RoHS Compliant



Note:

Material:Brass C2600 EH

Plated:Matte Tin Plated 80-160u"(2-4 μm)

Over Nickel Plated 40-80u"(1-2 μm)

Insertion Force With A 0.8mm Thick

Tab: 30N ±7N

Withdrawal Force With A 0.8mm Thick

Tab:47N±17N

Thickness 0.41mm±0.025mm

Current Rating:25A

Ordering Information

T6118040-03-SC

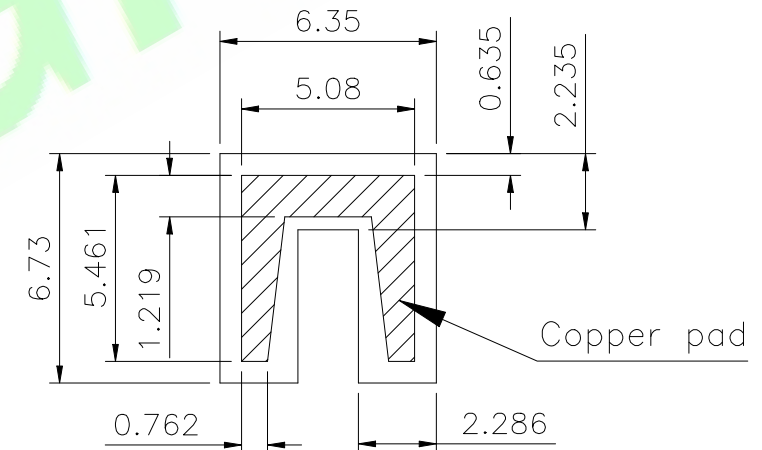


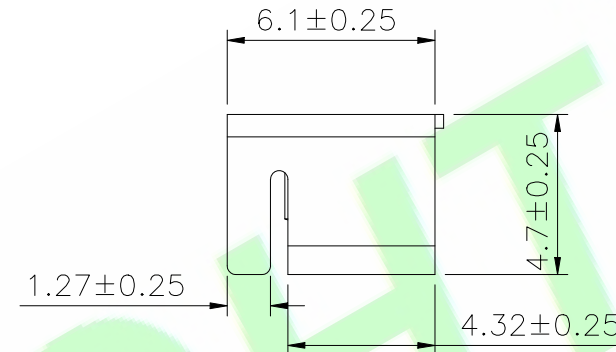
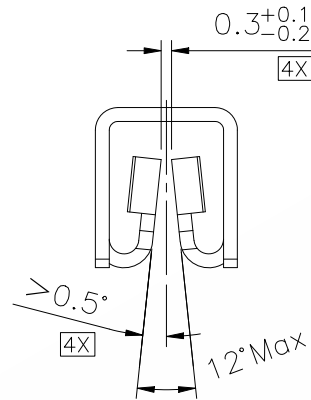
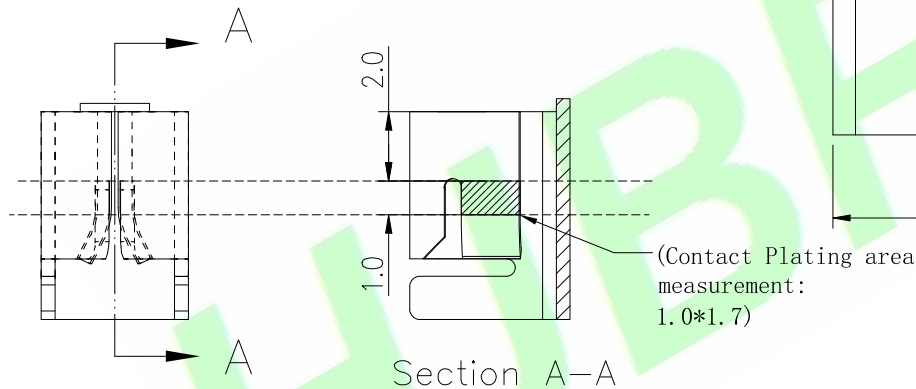
1

23

1: — Series No.

2: — S:Matte Tin Plated

3: — C:Tape&Reel

RECOMMENDED P.C.B LAYOUT
TOLERANCE=±0.05mm

Section A-A

5X	Update the coding principles	Judyyan	20260309	DR.BY.: YHJ	GENERAL TOLERANCE:		PART NO : T6118040—03—SC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED			
4X	Update size tolerance	Judyyan	20241011	CHKD.: Aren	LINEAR	ANGLES	DWG. NO.: 1238					
3X	Add New Section View	Zolin	20240713		x.: x': ±	TITLE :						
2X	Improve Product Information	Zolin	20240320	APPD.: Billy	x.x: ±0.30	x.x': ±3.0°	SMT UNIVERSAL TAB RECEPTACLE TOP ENTRY		SHEET: 1/1		A4	
1X	ORIGINAL	YHJ			x.xx: ±0.20	x.xx': ±2.0°			SCALE: 1:1			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11—1—2018		UNIT: mm			THIRD ANGLE PROJECTION