

Specifications:
Material And Finish:
Contact:C5191 T=0.3mm
Plated: Tin Plated







Specification:
Current Rating:15A
Operating Temperature Rating: -40°C~125°C

Electrical:
Contact resistance:10m Ohm Max

Ordering Information

TS-02-X
1 2

- 1: — Series No.
2: — A: In Bag
B: In Tube
D: Without Mylar In Tape & Reel
M: With Mylar In Tape & Reel

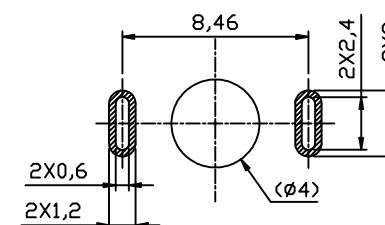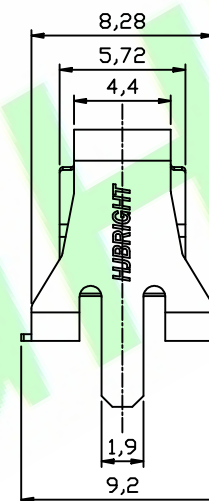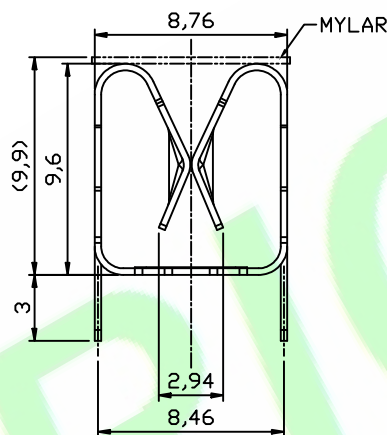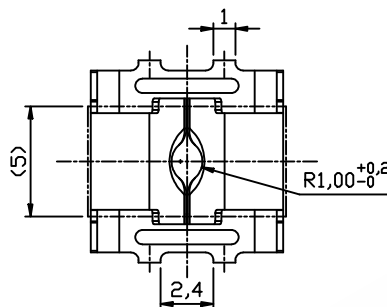

PCB LAYOUT (TOP VIEW)
Tolerance: ±0.05mm

1X	ORIGINAL	Hu.CH	ECN. NO.	DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : TS-02-X	HUBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	THIRD ANGLE PROJECTION	A4
				CHKD.: Hu.CH	LINEAR	ANGLES	DWG. NO.:					
REV.	DESCRIPTION	DR.BY		APPD.: Billy	X.:	X°: ±1.0°	TITLE : PCB Board Terminal	DATE: 03-Mar-2025	SCALE: 1:1	UNIT: mm		
					X.X: ±0.20	X.X°: ±0.5						
					X.XX: ±0.10	X.XX°:						
					X.XXX: ±0.05	X.XXX°:						