

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Blue

Contact:Copper Alloy

Shell:SPCC; Nickel Plated

Rating:**Current Rating:**

PIN1&PIN4:(Vvus&Correponding ground PIN)1.8A Max

Other PINS:0.25A Min

Voltage Rating:30V AC/DC

Operating Temperature Range:-30~+80°C

Electrical:**Contact resistance:**

PIN1&PIN4:30m Ohm Max

Other PINS:50m Ohm Max




Insulator resistance:100M ohm min.

Withstanding Voltage:100V AC/Minute




Ordering Information**USB30AF-18RH-01-C**

1 2 3 4 5 6

- 1: — Series No.
2: — AF:A Type Female
3: — No.of Positions
4: — R:R/A Type
5: — H:Selective Gold 1u"
6: — C:In Tray

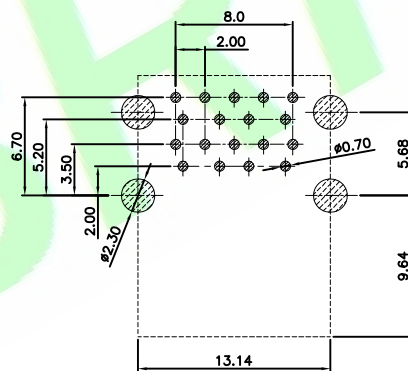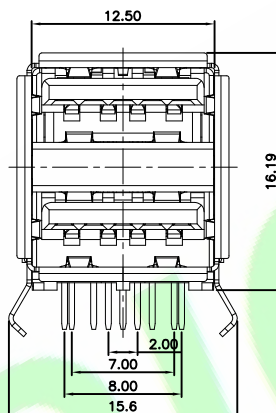


PCB LAYOUT REFERENCE

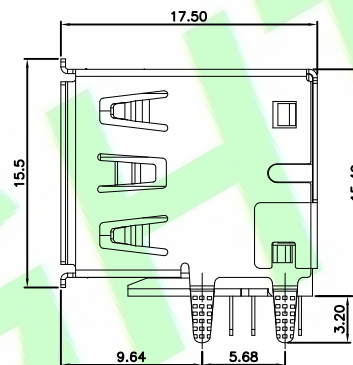

DATE

1112

表示12月
表示2011年

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : USB30AF-18RH-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED					
4X					LINEAR ANGLES		DWG. NO.:							
3X				CHKD.: Mark	x.: ±0.30	x°: ±5.0°	TITLE : USBAF 3.0 Double Row R/A Dip Short		SHEET: 1/1			A4		
2X					x.x: ±0.25	x.x°: ±3.0°			SCALE: 1:1					
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx°: ±2.0°	DATE: 2-Aug-2020		UNIT: mm				THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°								