

RoHS Compliant

- 1.Material: Copper alloys
- 2.Total Temperature Range: $-65^{\circ}\text{C}\sim+125^{\circ}\text{C}$
- 3.Current Carrying Capacity: 5.0 Amp
- 4.Plated:

GW: F: 0.8~2um Au over 1.3~2.2um Ni
C: 0.8~1.8um Sn over 1.3~2.2um Ni,

PLATED HOLE:

Cu-THICHN.: 25-50 μ m

FINISHED HOLE- ϕ : $1.07+0.045/-0.055$


Y064L250-XXXX-XX

1	2	3
---	---	---

2:—Length code

3:—Plated: Note 4

Y064L250-2080-TW	20.80	16.0
Y064L250-2080-GW		
Y064L250-1620-TW	16.60	11.8
Y064L250-1620-GW		
P/N	"L"	"M"

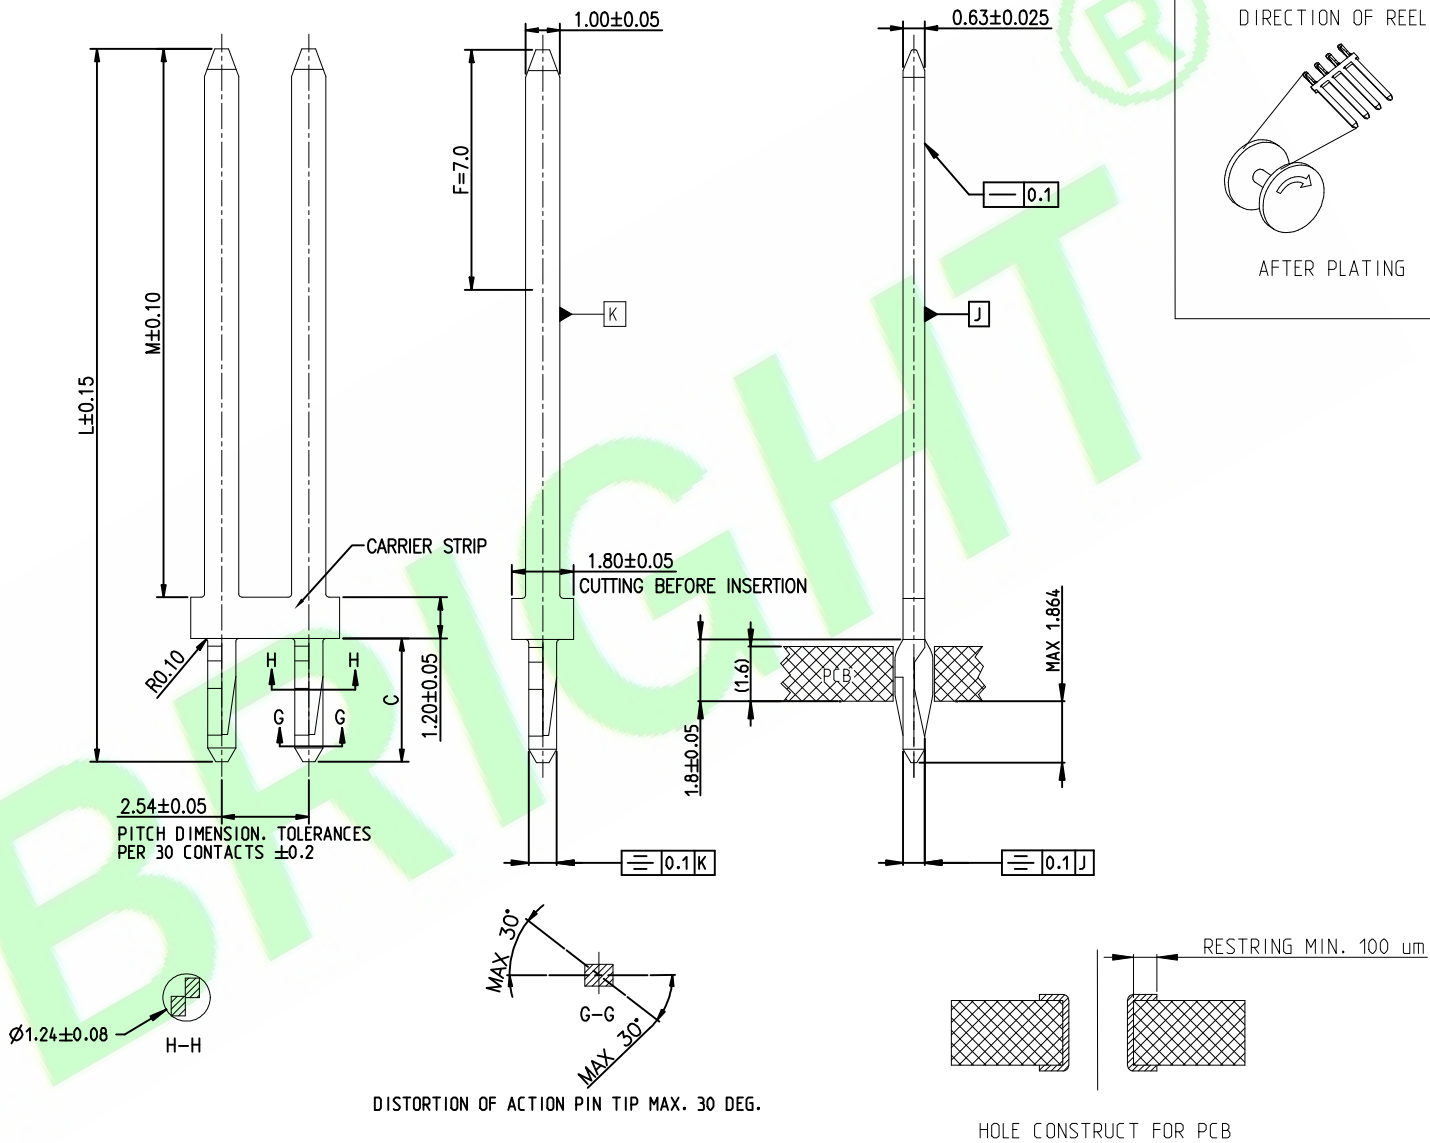

				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : Y064L250-XXXX-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES	DWG. NO.:				
				CHKD.: Aren	x.: ±0.30	x°: ±3.0°	TITLE : 0.64mm fisheye needle		SHEET: 1/1		A4
					x.x: ±0.25	x.x°: ±2.0°			SCALE: 1:1		
				APPD.: Billy	x.xx: ±0.10	x.xx°: ±1.0°			DATE: 23-NOV-2022		
2X	New specifications	Judyyan	20250414								
1X	ORIGINAL	Aren									
REV.	DESCRIPTION	DR.BY	ECN. NO.								

A4