

.059''(1.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.059''(1.50mm) Connectors



.059"(1.50mm) Pitch SMT Wafer


Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Contact:Copper Alloy
Naill:Copper Alloy
Plated:See Ordering Information
Rating:
Current Rating:1.5 Amp(24AWG)
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+125°C
Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute



HJBRIGHT®

Ordering Information
A15001H-XXS-01-XD
1 2 3 4 5 6

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:Matte Tin Plated
5:— Color:
N:Natural
B:Black
6:— D:In Tape&Reel

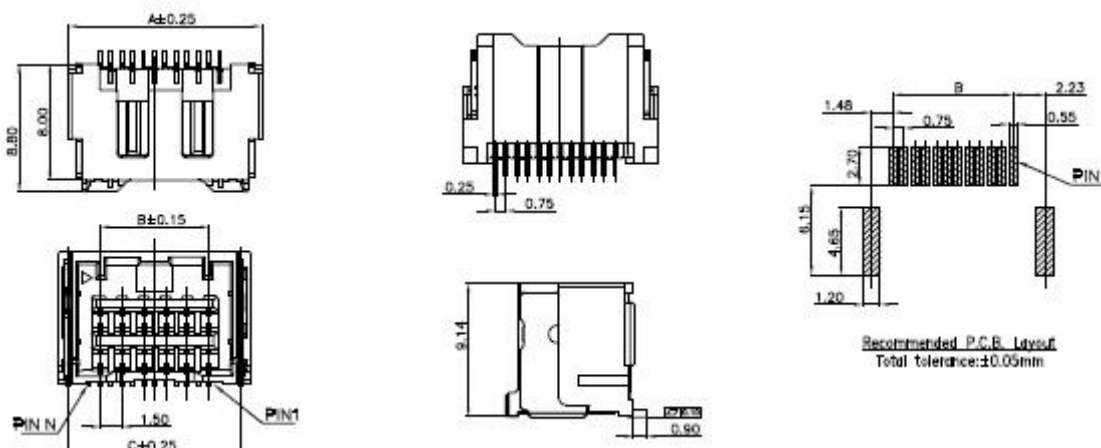


Poles	Dimensions(mm)		
	A	B	C
08P	10.30	4.50	8.93
10P	11.80	6.00	10.43
12P	13.30	7.50	11.93
14P	14.80	9.00	13.43
16P	16.30	10.50	14.93
18P	17.80	12.00	16.43
20P	19.30	13.50	17.93
22P	20.80	15.00	19.43
24P	22.30	16.50	20.93
26P	23.80	18.00	22.43
28P	25.30	19.50	23.93
30P	26.80	21.00	25.43
32P	28.30	22.50	26.93
34P	29.80	24.00	28.43
36P	31.30	25.50	29.93
38P	32.80	27.00	31.43
40P	34.30	28.50	32.93

Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Contact:Copper Alloy
Naill:Copper Alloy
Plated:See Ordering Information
Rating:
Current Rating:1.5 Amp(24AWG)
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+125°C
Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute



Ordering Information
A15001M-XXS-01-XF
1 2 3 4 5 6

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:Matte Tin Plated
5:— Color:
N:Natural
B:Black
R:Red
BL:Blue
GN:Green
6:— F:In Cap Tape&Reel

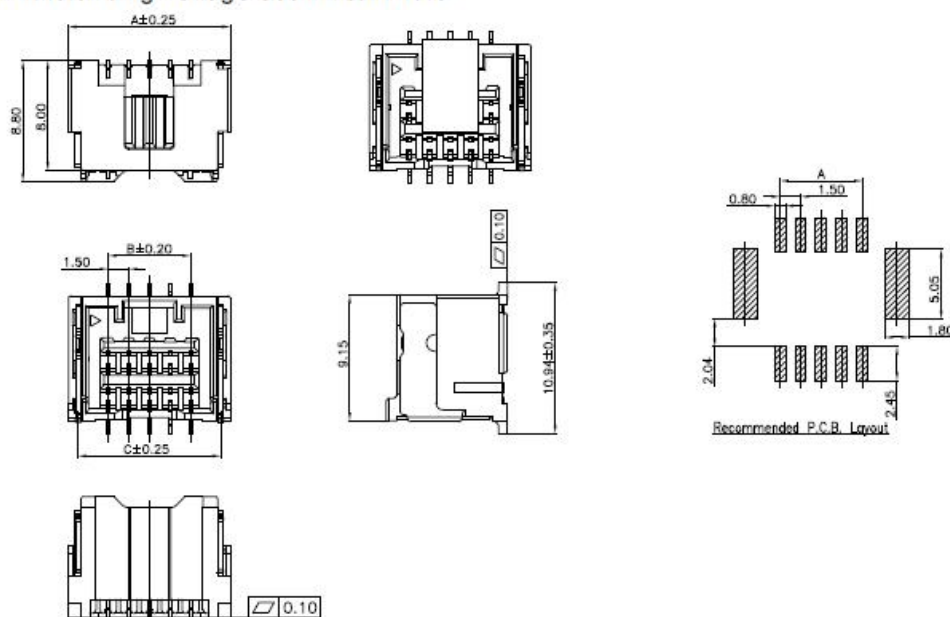

Poles	Dimensions(mm)		
	A	B	C
08P	10.30	4.50	8.93
10P	11.80	6.00	10.43
12P	13.30	7.50	11.93
14P	14.80	9.00	13.43
16P	16.30	10.50	14.93
18P	17.80	12.00	16.43
20P	19.30	13.50	17.93
22P	20.80	15.00	19.43
24P	22.30	16.50	20.93
26P	23.80	18.00	22.43
28P	25.30	19.50	23.93
30P	26.80	21.00	25.43
32P	28.30	22.50	26.93
34P	29.80	24.00	28.43
36P	31.30	25.50	29.93
38P	32.80	27.00	31.43
40P	34.30	28.50	32.93

东莞市华晶电子有限公司
<http://www.hjbright.com>

.059"(1.50mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PBT/PA66 UL94V-0

Rating:

Current Rating:1.5 Amp(24AWG)

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ Min

Withstanding Voltage:500V AC/minute



Ordering Information

H15001-XXP-XA

1 2 3 4

1:—Series No.

2:—No. of Positions

3:—N:Natural




B:Black

R:Red




BL:Blue

GN:Green




4:—A:In Bag



8~10 PIN



12~22 PIN



24~40 PIN

Poles	Dimensions(mm)		
	A	B	C
08P	10.20	7.20	4.50
10P	11.70	8.70	6.00
12P	13.20	10.20	7.50
14P	14.70	11.70	9.00
16P	16.20	13.20	10.50
18P	17.70	14.70	12.00
20P	19.20	16.20	13.50
22P	20.70	17.70	15.00
24P	22.20	19.20	16.50
26P	23.70	20.70	18.00
28P	25.20	22.20	19.50
30P	26.70	23.70	21.00
32P	28.20	25.20	22.50
34P	29.70	26.70	24.00
36P	31.20	28.20	25.50
38P	32.70	29.70	27.00
40P	34.20	31.20	28.50

Specifications:

Material And Finish:

Material:phosphor bronze

Wire Range:AWG#24~28

Insulation O.D.:1.30(max)

Rating:

Current Rating:1.5 Amp(24AWG)

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ Min

Withstanding Voltage:500V AC/minute



Ordering Information


H15001T-PQ

1 2 3


1:—Series No.

2:—T:Terminal

3:—Q:Plated Tin



SEC A-A



SEC B-B



SEC C-C

