



.059" (1.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.059" (1.50mm) Connectors



.059"(1.50mm) Pitch SMT Wafer

Specifications:
Material And Finish:
Insulator: PA6T/LCP UL94V-0 Color: Natural
Contact: Copper Alloy
Plated: See Ordering Information
Rating:
Current Rating: 2.0A AC/DC(24AWG)
Voltage Rating: 100V AC/DC
Operating Temperature Range: -40°~+125°C
Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 500M ohm min.
Withstanding Voltage: 500V AC/Minute

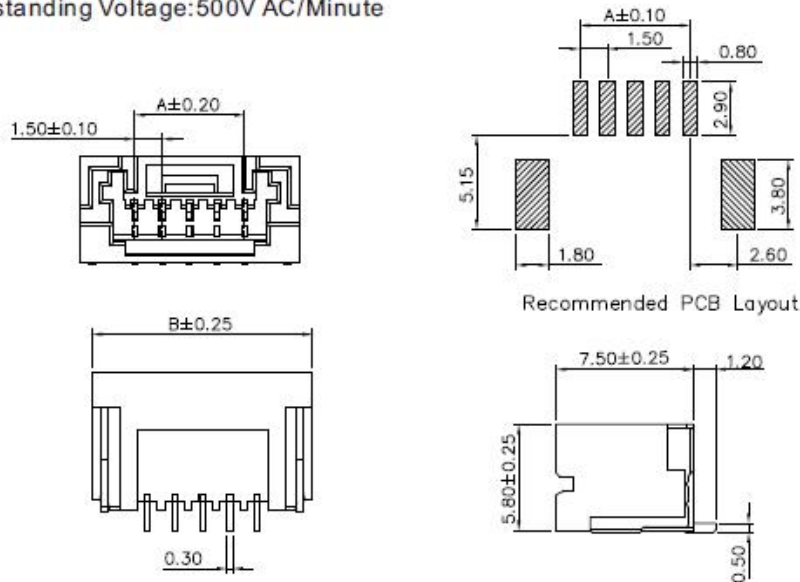


HJBRIGHT®

Ordering Information
A1502H-XXQ-01-XG
1 2 3 4 5 6

- 1:— Series No.
2:— H: Horizontal SMT Type
3:— No. of Positions
4:— Q: Tin Plated
5:— N: PA6T
C: LCP
6:— G: W/O Cap In Tape&Reel

Circuits	Dimensions	
	A	B
02	1.50	7.50
03	3.00	9.00
04	4.50	10.50
05	6.00	12.00
06	7.50	13.50
07	9.00	15.00
08	10.50	16.50
09	12.00	18.00
10	13.50	19.50
11	15.00	21.00
12	16.50	22.50
13	18.00	24.00
14	19.50	25.50
15	21.00	27.00
16	22.50	28.50

Specifications:
Material And Finish:
Insulator: PA9T/LCP UL94V-0 Color: Natural
Contact: Copper Alloy
Plated: See Ordering Information
Rating:
Current Rating: 2.0Amp
Voltage Rating: 100V AC/DC
Operating Temperature Range: -40°~+125°C
Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 500M ohm min.
Withstanding Voltage: 500V AC/Minute

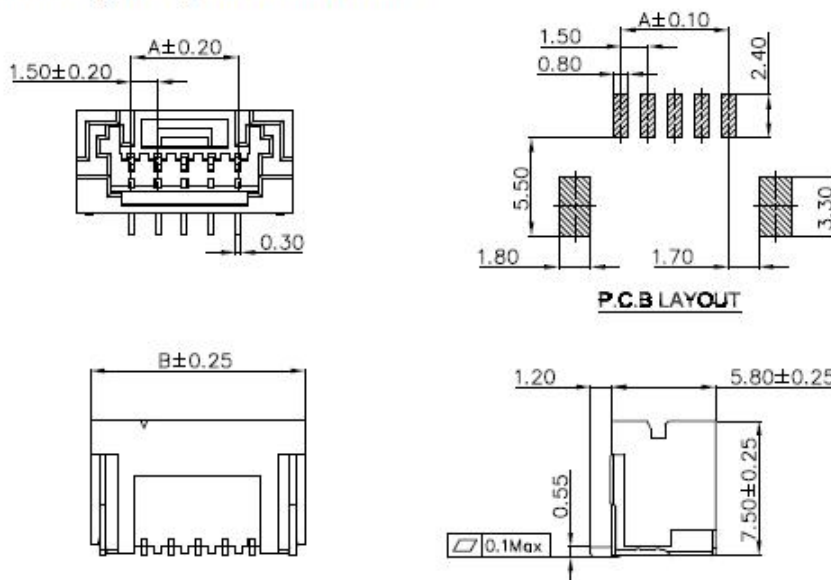

Ordering Information
A1502M-XXX-01-XX
1 2 3 4 5 6

- 1:— Series No.
2:— M: SMT Type
3:— No. of Positions
4:— Plated:
A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— Insulator:
G: PA9T
C: LCP
6:— G: In Tape&Reel
M: W/Mylar In Tape&Reel

Poles	Dimensions(mm)	
	A	B
02P	1.50	7.50
03P	3.00	9.00
04P	4.50	10.50
05P	6.00	12.00
06P	7.50	13.50
07P	9.00	15.00
08P	10.50	16.50
09P	12.00	18.00
10P	13.50	19.50
11P	15.00	21.00
12P	16.50	22.50
13P	18.00	24.00
14P	19.50	25.50
15P	21.00	27.00
16P	22.50	28.50

东莞市华晶电子有限公司
<http://www.hjbright.com>


.059" (1.50mm) Pitch Housing / Terminal

Specifications:
 Material And Finish:
 Insulator:PA66 UL94V-0, Color:Natural
 Rating:
 Current Rating:2.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40°~+105°C
 Contact Resistance:20mΩ Max
 Insulation Resistance 500MΩ Min
 Withstanding Voltage:500V AC/minute



Ordering Information
 H1502-XXP-A
 1 2 3

1:—Series No.
 2:—No. of Positions
 3:—A:In Bag

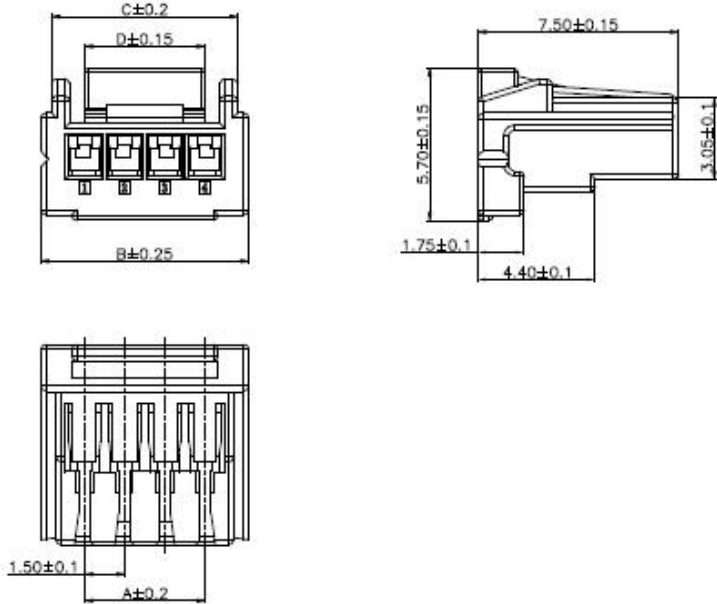

Poles	Dimensions(mm)	
	A	B
02	1.50	5.00
03	3.00	6.30
04	4.50	7.80
05	6.00	9.30
06	7.50	10.80
07	9.00	12.30
08	10.50	13.80
09	12.00	15.30
10	13.50	16.80
11	15.00	18.30
12	16.50	19.80
13	18.00	21.30
14	19.50	22.80
15	21.00	24.30
16	22.50	25.80

Specifications:
 Material:phosphor bronze
 Wire Range:AWG#24~28
 Insulation O.D.:1.2(max)



Ordering Information
 H1502T-PQ
 1 2 3

1:—Series No.
 2:—T:Terminal
 3:—Plated:
 Q:Plated Tin

