


.059''(1.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.059''(1.50mm) Connectors

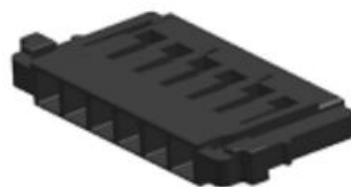


.059" (1.50mm) Pitch SMT Wafer/ Housing

Specifications:
Material And Finish:
Insulator:PA6T UL94V-0
Contact:Copper Alloy
Plated:See Ordering Information
Rating:
Current Rating:3.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+125°C
Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute



Ordering Information
A1503H-XXX-01-X
1 2 3 4 5

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
D:In Tape&Reel

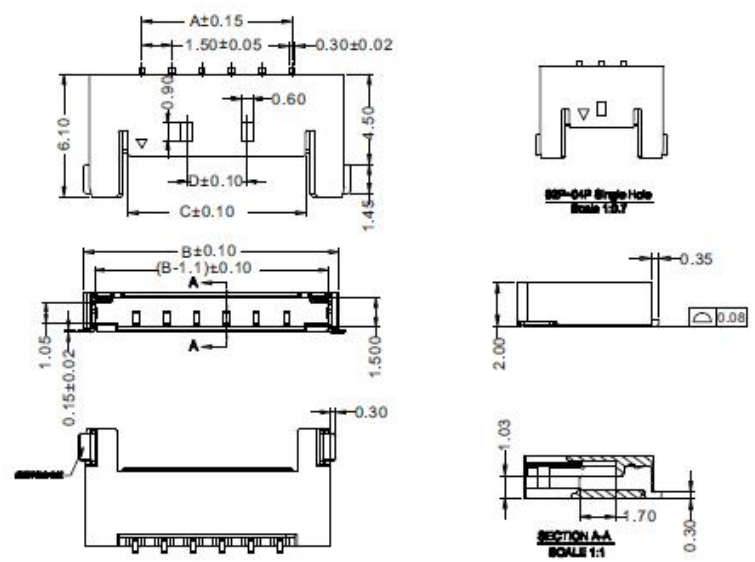


Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	3.00
08	10.50	15.75	11.85	3.00
09	12.00	17.25	13.35	6.00
10	13.50	18.75	14.85	8.55
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Black
Rating:
Current Rating:3.0 Amp
Operating Temperature Range:-40°~+105°C




Ordering Information
H1503-XXP-A
1 2 3

- 1:— Series No.
2:— No. of Positions
3:— A:In Bag

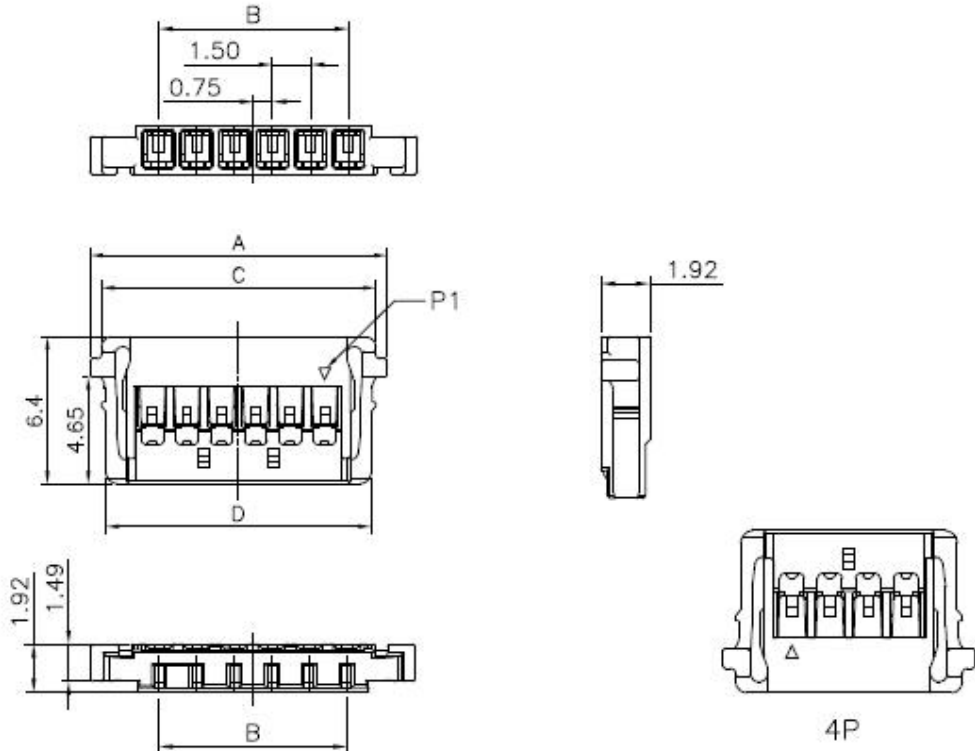

Circuits	Dimensions			
	A	B	C	D
04	9.95	4.5	8.95	8.55
05	11.45	6.0	10.45	10.05
06	12.95	7.5	11.95	11.55
07	14.45	9.0	13.45	13.05
08	15.95	10.5	14.95	14.55
10	18.95	13.5	17.95	17.55
12	21.95	16.5	20.95	20.55

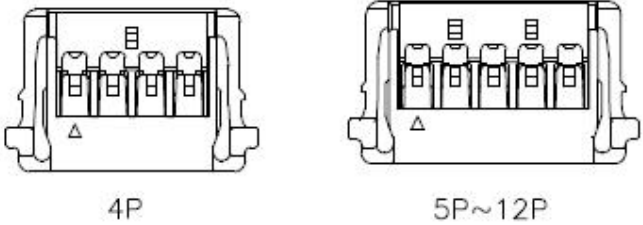




.059"(1.50mm) Pitch Terminal

Specifications:
Material: Phosphor Bronze
Wire Range: AWG#24~28
Insulation O.D.: 1.2 Max


HJBRIGHT®

Ordering Information
H1503T-PX
1 2 3

1:—Series No.
2:—T:Terminal
3:—Plated:
A:Gold Flash
G3:3u" Gold
G4:4u" Gold

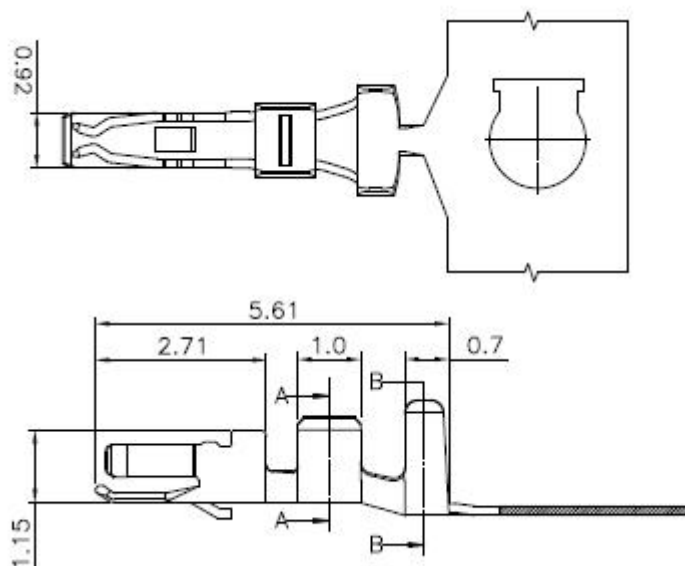

SECTION A-A



SECTION B-B